Hixon



Large Metal Storage Shed Assembly Guide

6 x 6 ft (1.8 x 1.8 m)



IMPORTANT: PLEASE REGISTER YOUR HEX LIVING PRODUCT AFTER ASSEMBLY

Using the unique serial number, simply register your product at **www.hexliving.co.uk** or use the QR code above to access the HEX Living lifetime warranty and online support.





PLEASE READ THIS DOCUMENT FULLY PRIOR TO STARTING ASSEMBLY PROCEDURE

The objective of this instruction is to illustrate the recommended assembly sequence for this product, any deviation from this will be the sole responsibility of whoever carries out the assembly.

IMPORTANT: IT IS ADVISABLE THAT THE PRODUCT IS ASSEMBLED AT, OR AS CLOSE AS POSSIBLE TO WHERE IT WILL BE FINALLY LOCATED

Ensure there is adequate clearance where the product is to be located:

Exterior dimensions i	including	overhang	(W	x D x H)
-----------------------	-----------	----------	----	----------

Footprint dimensions (W x D)

Clearance required for door to open (W x H)

1700 x 1700mm

1800 x 1840 x 2140mm

Doors open outwards 1454 x 1820mm

TWO PERSON ASSEMBLY

Most procedures will not require two people but it may be easier to have assistance.



PERSONAL PROTECTION EQUIPMENT

We advise appropriate personal protective equipment is worn during assembly including eye protection and gloves.



CARING FOR YOUR HEX LIVING PRODUCT

Your **HEX Living** product is designed to stand the test of time, which is why we're happy to offer a lifetime warranty on our products. With zero maintenance required, simply assemble your HEX Living product and enjoy putting it to great use in your garden.

Periodically, you might want to give your product a clean, these simple care tips are not essential to the performance of your product:

- Remove surface dirt with plain water using a jet wash or sponge, the coating on our products will ensure dirt or mud simply wipes away.
- Periodically clear the lid of fallen leaves.
- If your product has guttering, remove leaves and garden debris as you would on your home.

PRODUCT REGISTRATION

IMPORTANT: Prior to assembly, please ensure you have registered your HEX Living product using the unique serial number found on the cover of this document, please visit **www.hexliving.co.uk** to register your product and access the HEX Living lifetime warranty and video instructions.

GROUND ANCHOR KIT

A Ground Anchor Kit is supplied, this is to secure the product to a solid concrete base, the shed has x4 clamp plates in each corner.


WE STRONGLY ADVISE THAT THE SHED IS ANCHORED USING THIS KIT

The diagram illustrates the typical fixing method, once the shed is assembled, access the clamp brackets by removing the appropriate floor panel and secure as required.

GROUND ANCHOR KIT


Part Ref: FK8 M8 x 50mm Coach Screw Qty: x8





ENSURE ALL ITEMS LISTED ARE PRESENT PRIOR TO STARTING ASSEMBLY PROCEDURE

SCALE OF ITEMS WILL VARY TO AID VISUAL IDENTIFICATION

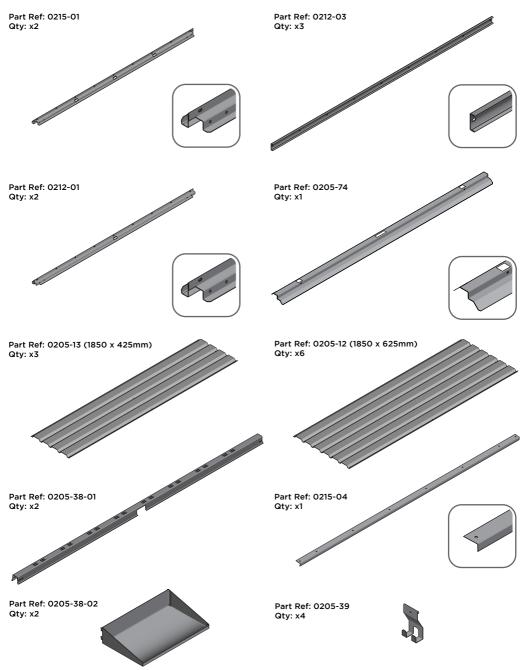


ENSURE ALL ITEMS LISTED ARE PRESENT PRIOR TO STARTING ASSEMBLY PROCEDURE SCALE OF ITEMS WILL VARY TO AID VISUAL IDENTIFICATION

Part Ref: 0205-14 (1885mm Long) Part Ref: 0215-02 Qty: x2 Qty: x4 Part Ref: 0212-13 Qty: x2 Part Ref: 0205-15 (2100mm Long) Qty: x2 Part Ref: 0212-14 Qty: x2 Part Ref: 0215-06 Qty: x2 Part Ref: 0205-16 (R/H) Qty: x1 Part Ref: 0212-05 (1800 x 625mm) Qty: x2 Part Ref: 0212-06 (1800 x 215mm) Part Ref: 0205-17 (L/H) Qty: x1 Qty: x1 ...

ENSURE ALL ITEMS LISTED ARE PRESENT PRIOR TO STARTING ASSEMBLY PROCEDURE

SCALE OF ITEMS WILL VARY TO AID VISUAL IDENTIFICATION

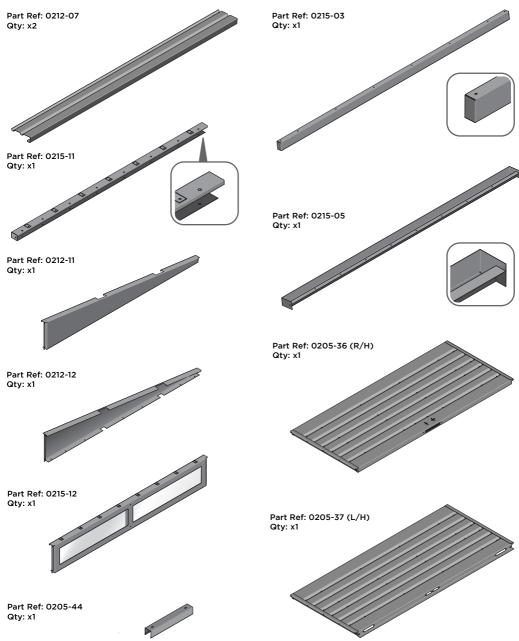

ENSURE ALL ITEMS LISTED ARE PRESENT PRIOR TO STARTING ASSEMBLY PROCEDURE SCALE OF ITEMS WILL VARY TO AID VISUAL IDENTIFICATION

Part Ref: 0203-03 Qty: x4

Part Ref: 0203-15 Qty: x4

Part Ref: 0203-28 (L/H Assembly) Qty: x2

Part Ref: 0203-27 (R/H Assembly) Qty: x2

Part Ref: 0203-32 (Assembly) Qty: x1



Part Ref: 0203-33 (Assembly) Qty: x1

Part Ref: 0203-34 (Assembly) Qty: x1

Part Ref: 0203-35 Qty: x2

Part Ref: 0203-36 Qty: x1

Part Ref: 0203-37 Qty: x4

Part Ref: 0203-39 Qty: x4

Part Ref: 0203-40 Qty: x4

Part Ref: 0203-41 Qty: x1 Part Ref: 0205-57 Qty: x4

Part Ref: 0205-63 Qty: x2

Part Ref: 0205-66 Qty: x2

Part Ref: 0205-68 Qty: x4

Part Ref: 0205-52 Qty: x1

Part Ref: 0205-53 Qty: x1

Part Ref: 0203-57 Qty: x4

Part Ref: FK1 M4 x 10mm Roofing Bolt This will be Pozi or Slotted Qty: x235

Part Ref: FK2 No.8 x 13mm Eco Fix Qty: x32

Part Ref: FK3 M4 x 12mm C'Sunk Pozi Pan Qty: x31

Part Ref: FK4 M4 Rubber Washer Qty: x34

Part Ref: FK5 M4 Serrated Flange Nut Qty: x261

Part Ref: FK6 M8 Serrated Flange Nut Qty: x5

Part Ref: FK7 Expansion Plug Qty: x8

Part Ref: FK8 M8 x 50mm Coach Screw Qty: x8


























LOCATE AND SECURE A CORNER BRACE 0203-03 AT EACH LOCATION INDICATED.

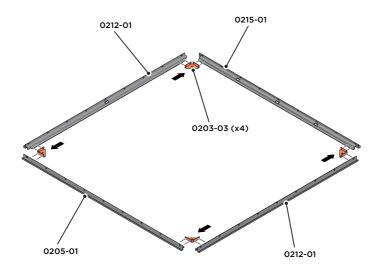









PLEASE NOTE: SECTION VIEW OF TYPICAL FIXING METHOD


LOCATE AND LOOSELY ATTACH WALL PANEL 0205-12 (1850 x 625mm).



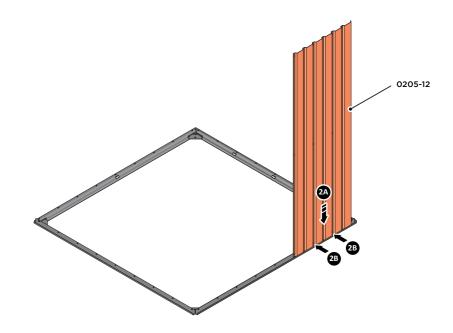




LOCATE WALL PANEL 0205-12 INTO POSITION AS SHOWN ABOVE. IMPORTANT: ENSURE PANEL IS IN THE CORRECT ORIENTATION.





LOOSELY ATTACH WALL PANEL AT x2 LOCATIONS INDICATED ONLY. IMPORTANT: DO NOT SECURE ANY FIXING POINTS OTHER THAN THOSE INDICATED.

34


LOCATE AND LOOSELY ATTACH CORNER POST 0205-15 (2100mm).



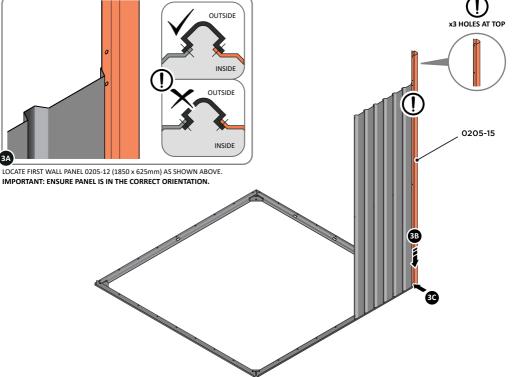





LOCATE CORNER POST 0205-15 (2100mm) AS SHOWN ABOVE.




LOOSELY ATTACH CORNER POST AT LOCATION INDICATED ONLY. IMPORTANT: DO NOT SECURE AT UPPER FIXING POINT AT THIS STAGE.

LOCATE AND LOOSELY ATTACH MID CENTRE BRACE 0212-03.

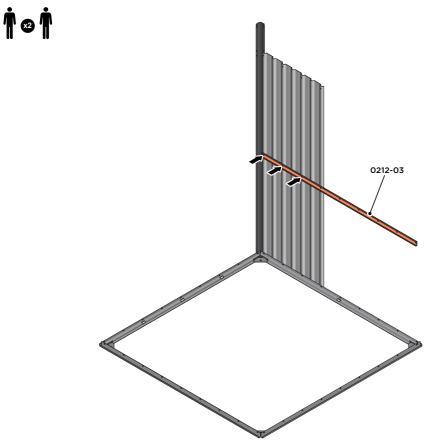




LOCATE AND LOOSELY ATTACH MID CENTRE BRACE 0212-03 AS SHOWN AT x3 LOCATIONS INDICATED ABOVE.




LOOSELY ATTACH AT x3 LOCATIONS INDICATED ONLY. IMPORTANT: DO NOT SECURE AT OUTER FIXING POINT INDICATED.


LOCATE AND LOOSELY ATTACH WALL PANEL 0205-12 (1850 x 625mm).



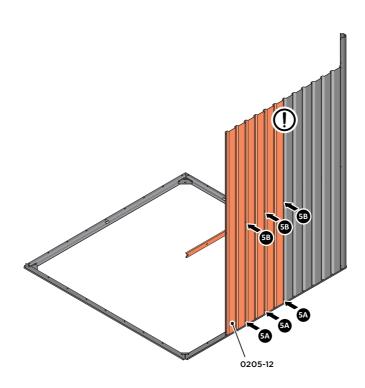




LOCATE AND LOOSELY ATTACH WALL PANEL AT x3 LOCATIONS INDICATED. IMPORTANT: ENSURE PANEL IS IN THE CORRECT ORIENTATION.




LOOSELY ATTACH AT x3 LOCATIONS INDICATED ONLY.


LOCATE AND LOOSELY ATTACH WALL PANEL 0205-13 (1850 x 425mm).



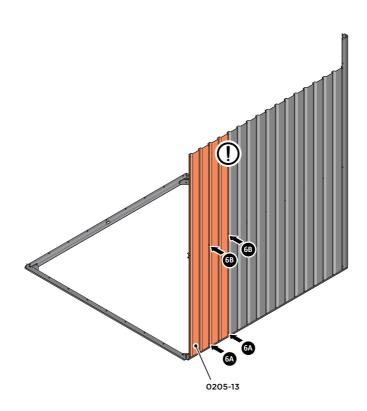




LOCATE AND LOOSELY ATTACH WALL PANEL AT x2 LOCATIONS INDICATED. IMPORTANT: ENSURE PANEL IS IN THE CORRECT ORIENTATION.




LOOSELY ATTACH AT x2 LOCATIONS INDICATED ONLY.


LOCATE AND LOOSELY ATTACH CORNER POST 0205-14 (1885mm).




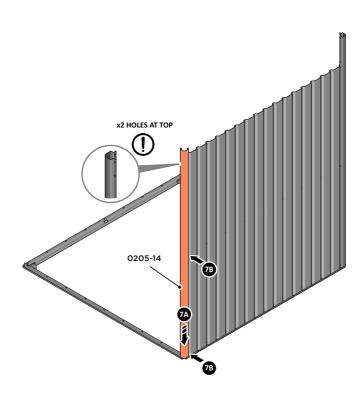





LOCATE CORNER POST 0205-14 (1885mm) AS SHOWN ABOVE.







LOCATE AND LOOSELY ATTACH WALL PANEL 0205-13 (1850 x 425mm).

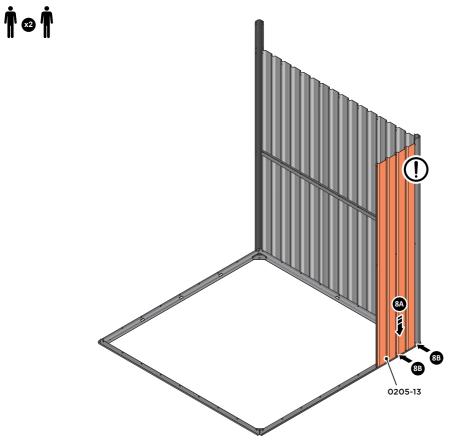










LOOSELY ATTACH WALL PANEL AT x2 LOCATIONS INDICATED ONLY. IMPORTANT: DO NOT SECURE ANY FIXING POINTS OTHER THAN THOSE INDICATED.

LOCATE AND LOOSELY ATTACH WALL PANEL 0205-12 (1850 x 625mm).

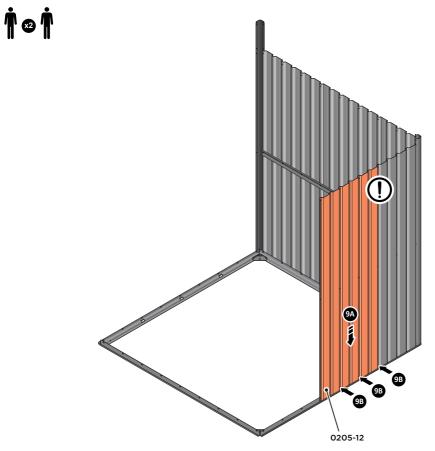





LOCATE WALL PANEL 0205-12 INTO POSITION AS SHOWN ABOVE. IMPORTANT: ENSURE PANEL IS IN THE CORRECT ORIENTATION.




LOOSELY ATTACH BACK WALL PANEL AT x3 LOCATIONS INDICATED ONLY. IMPORTANT: DO NOT SECURE ANY FIXING POINTS OTHER THAN THOSE INDICATED.

LOCATE AND LOOSELY ATTACH LONG CENTRE BRACE 0212-03.

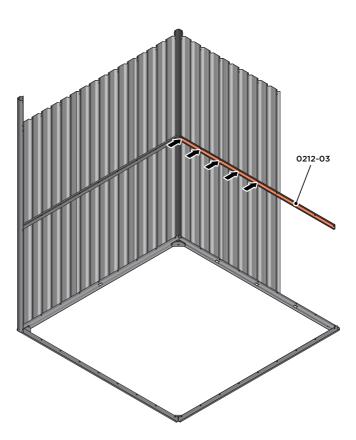





LOCATE AND LOOSELY ATTACH LONG CENTRE BRACE 0212-03 AS SHOWN AT x5 LOCATIONS INDICATED ABOVE.




LOOSELY ATTACH AT x5 LOCATIONS INDICATED ONLY. IMPORTANT: DO NOT SECURE AT OUTER FIXING POINT INDICATED.

LOCATE AND LOOSELY ATTACH WALL PANEL 0205-12 (1850 x 625mm).

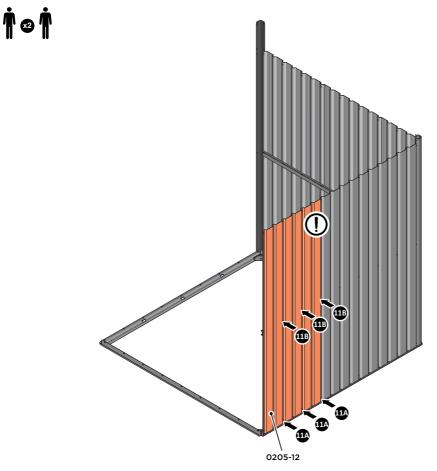





LOCATE AND LOOSELY ATTACH WALL PANEL AT x3 LOCATIONS INDICATED. IMPORTANT: ENSURE PANEL IS IN THE CORRECT ORIENTATION.



LOOSELY ATTACH AT x3 LOCATIONS INDICATED ONLY.

LOCATE AND LOOSELY ATTACH CORNER POST 0205-14 (1885mm).

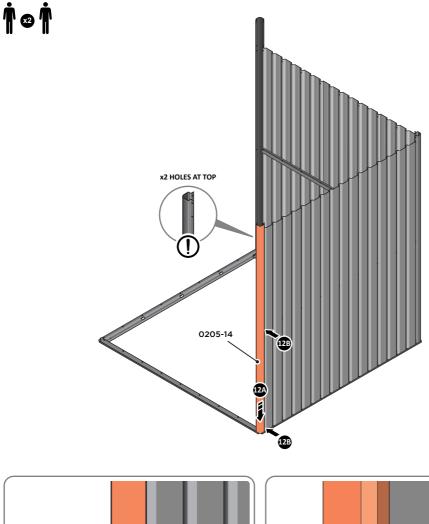





LOCATE CORNER POST 0205-14 (1885mm) AS SHOWN ABOVE.




LOOSELY ATTACH CORNER POST AT x2 LOCATIONS INDICATED ONLY. IMPORTANT: DO NOT SECURE AT UPPER FIXING POINT AT THIS STAGE.

LOCATE AND LOOSELY ATTACH WALL PANEL 0205-13 (1850 x 425mm).

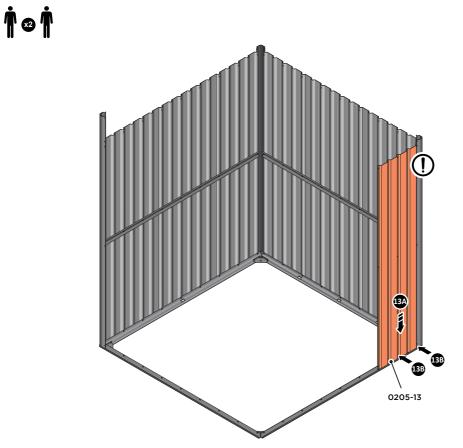





LOCATE FIRST WALL PANEL 0205-13 (1850 x 425mm) AS SHOWN ABOVE. IMPORTANT: ENSURE PANEL IS IN THE CORRECT ORIENTATION.




LOOSELY ATTACH WALL PANEL AT x2 LOCATIONS INDICATED ONLY. IMPORTANT: DO NOT SECURE ANY FIXING POINTS OTHER THAN THOSE INDICATED.

LOCATE AND LOOSELY ATTACH WALL PANEL 0205-12 (1850 x 625mm).

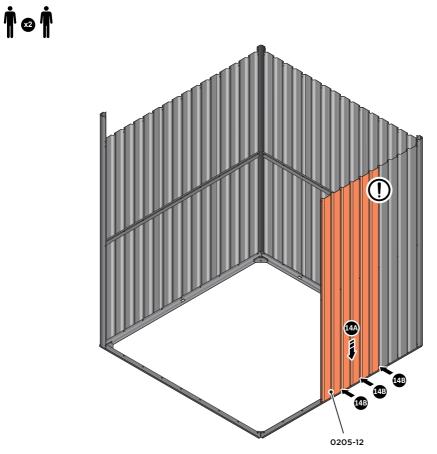





LOCATE WALL PANEL 0205-12 INTO POSITION AS SHOWN ABOVE. IMPORTANT: ENSURE PANEL IS IN THE CORRECT ORIENTATION.




LOOSELY ATTACH WALL PANEL AT x3 LOCATIONS INDICATED ONLY. IMPORTANT: DO NOT SECURE ANY FIXING POINTS OTHER THAN THOSE INDICATED.

LOCATE AND LOOSELY ATTACH MID CENTRE BRACE 0212-03.

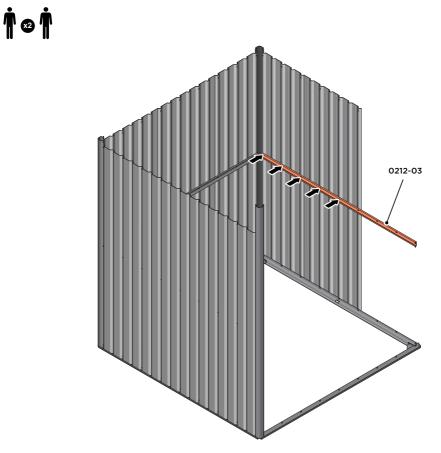





LOCATE AND LOOSELY ATTACH MID CENTRE BRACE 0212-03 AS SHOWN AT x5 LOCATIONS INDICATED ABOVE.




LOOSELY ATTACH AT x5 LOCATIONS INDICATED ONLY. IMPORTANT: DO NOT SECURE AT OUTER FIXING POINT INDICATED.

LOCATE AND LOOSELY ATTACH WALL PANEL 0205-12 (1850 x 625mm).

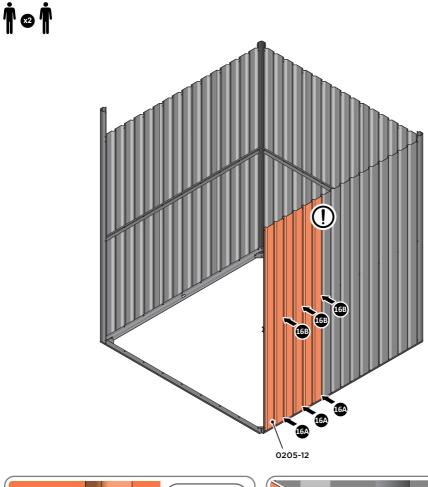




LOCATE AND LOOSELY ATTACH WALL PANEL AT x3 LOCATIONS INDICATED. IMPORTANT: ENSURE PANEL IS IN THE CORRECT ORIENTATION.



LOOSELY ATTACH AT x3 LOCATIONS INDICATED ONLY.


LOCATE AND LOOSELY ATTACH CORNER POST 0205-15 (2100mm).

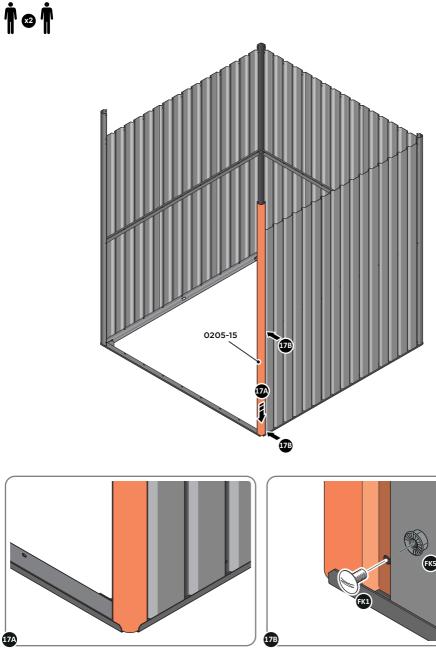

LOCATE CORNER POST 0205-15 (2100mm) AS SHOWN ABOVE.

LOOSELY ATTACH CORNER POST AT x2 LOCATIONS INDICATED ONLY. IMPORTANT: DO NOT SECURE AT UPPER FIXING POINT AT THIS STAGE.


LOCATE AND LOOSELY ATTACH RIGHT-HAND DOOR POST 0205-16.

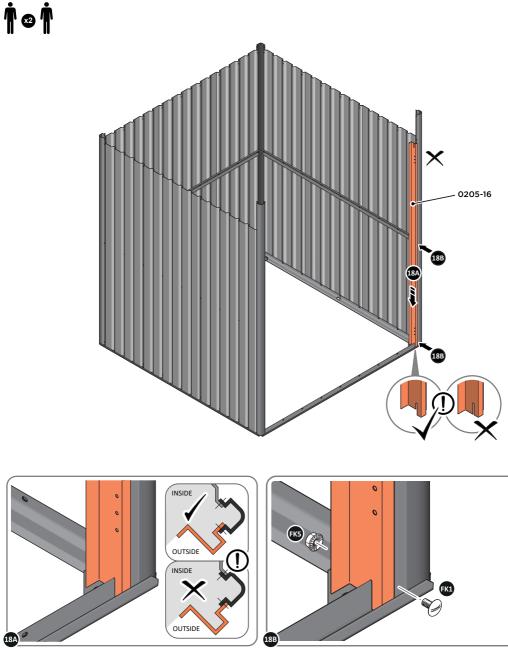

LOCATE RIGHT-HAND DOOR POST 0205-16 AS SHOWN ABOVE.

SECURE DOOR POST AT x2 LOCATIONS INDICATED. IMPORTANT: DO NOT SECURE AT UPPER FIXING POINT AT THIS STAGE.

LOCATE AND LOOSELY ATTACH LEFT-HAND DOOR POST 0205-17.

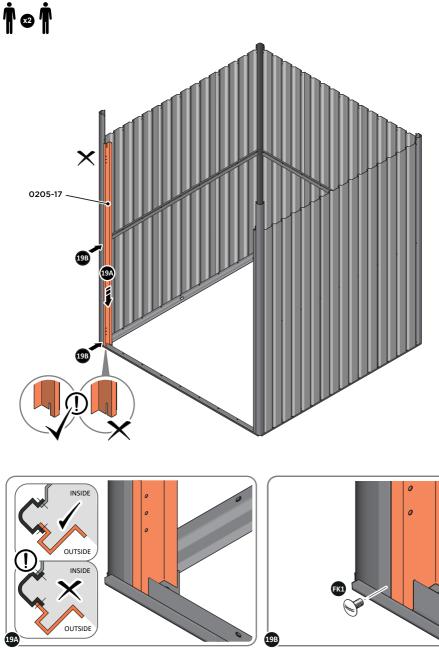


LOCATE RIGHT-HAND DOOR POST 0205-17 AS SHOWN ABOVE.


SECURE DOOR POST AT x2 LOCATIONS INDICATED. IMPORTANT: DO NOT SECURE AT UPPER FIXING POINT AT THIS STAGE.

FKS FKS


LOCATE AND LOOSELY ATTACH SHORT ROOF RAIL 0215-02.



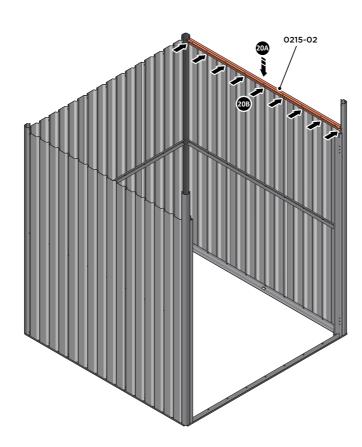





LOCATE SHORT ROOF RAIL 0215-02 AS SHOWN ABOVE.




LOOSELY ATTACH AT x9 LOCATIONS INDICATED.

LOCATE AND LOOSELY ATTACH SHORT ROOF RAIL 0215-02.

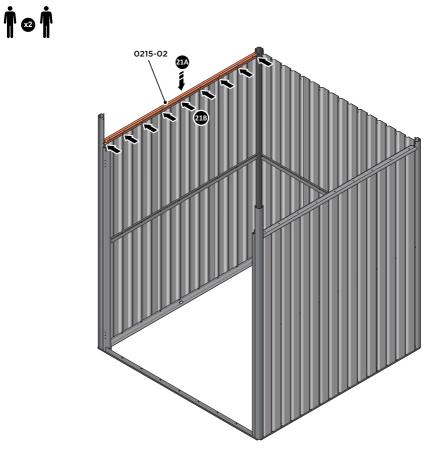




LOCATE SHORT ROOF RAIL 0215-02 AS SHOWN ABOVE.




LOOSELY ATTACH AT x9 LOCATIONS INDICATED.


LOCATE AND LOOSELY ATTACH LONG ROOF RAIL 0215-02.



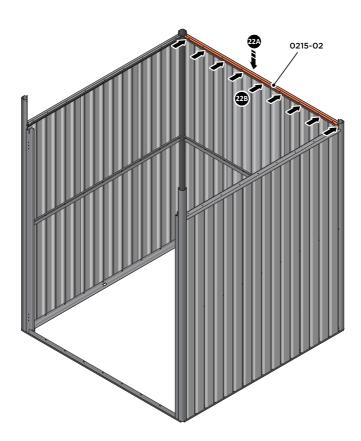





LOCATE LONG ROOF RAIL 0215-02 AS SHOWN ABOVE.



LOOSELY ATTACH AT x9 LOCATIONS INDICATED.


LOCATE AND LOOSELY ATTACH LONG ROOF RAIL 0215-02.

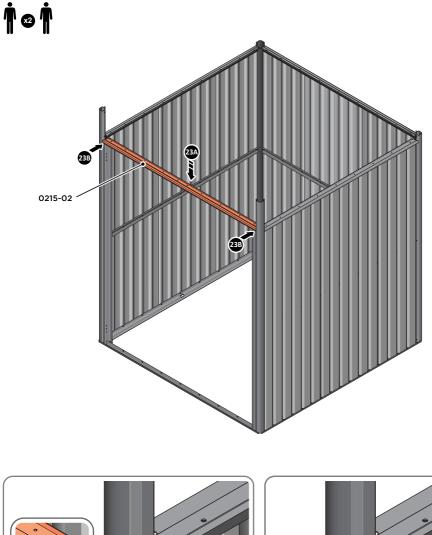




LOCATE LONG TOP RAIL 0215-02 AS SHOWN ABOVE.

23A




LOOSELY ATTACH AT x2 LOCATIONS INDICATED.

LOCATE GROUND ANCHOR BRACKETS 0205-57.

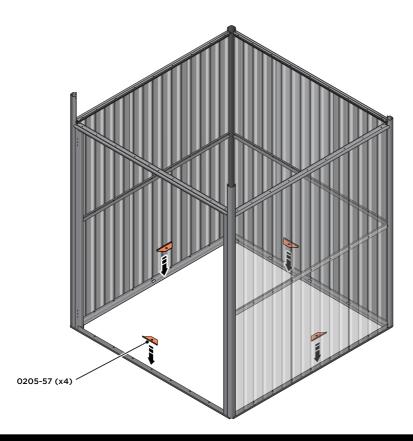



THESE BRACKETS ARE SECURED USING GROUND ANCHOR KIT ONCE THE SHED WALL PANELS ARE FULLY ASSEMBLED (SEE PAGE '7')




LOCATE x4 GROUND ANCHOR BRACKETS 0205-57 AS SHOWN ABOVE, THESE ALLOW FOR FIXING TO A CONCRETE BASE AT A LATER STAGE IF DESIRED.

LOCATE AND SECURE DOOR STRIP 0205-74

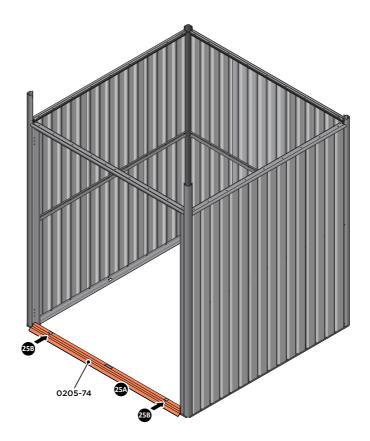





IMPORTANT: ENSURE DOOR STRIP IS PUSHED AGAINST DOOR POST RETURN. USE EXISTING HOLE AS A LOCATION GUIDE.




SECURE DOOR STRIP ONTO FLOOR PANELS AT x2 LOCATIONS INDICATED, USE EXISTING HOLE AS A LOCATION GUIDE.

LOCATE AND SECURE ROOF SIDE INFILL 0212-11.

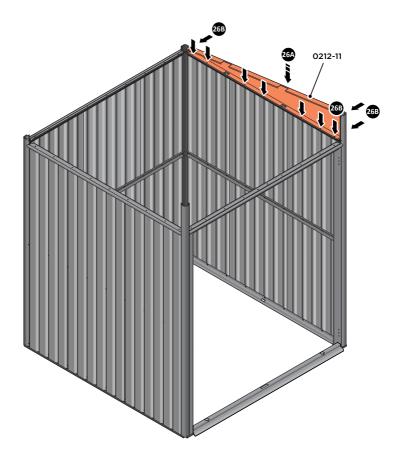





LOCATE ROOF SIDE INFILL 0212-11 AS SHOWN ABOVE.




SECURE ROOF SIDE INFILL AT LOCATIONS INDICATED AS SHOWN ABOVE.

LOCATE AND SECURE ROOF SIDE INFILL 0212-12.

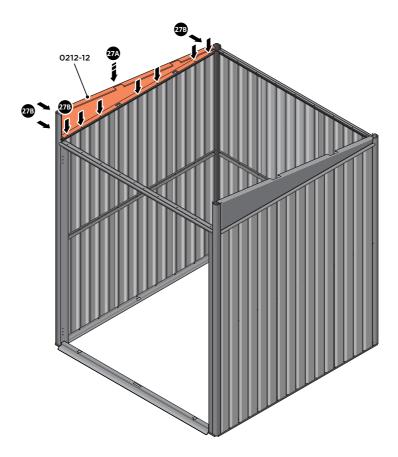




LOCATE ROOF SIDE INFILL 0212-12 AS SHOWN ABOVE.




SECURE ROOF SIDE INFILL AT LOCATIONS INDICATED AS SHOWN ABOVE.

LOCATE AND SECURE ROOF REAR INFILL 0215-11.







LOCATE ROOF REAR INFILLS 0215-11 AS SHOWN ABOVE.




SECURE ROOF REAR INFILL AT x9 LOCATIONS INDICATED AS SHOWN ABOVE.

LOCATE AND SECURE WINDOW ASSEMBLY 0215-12.

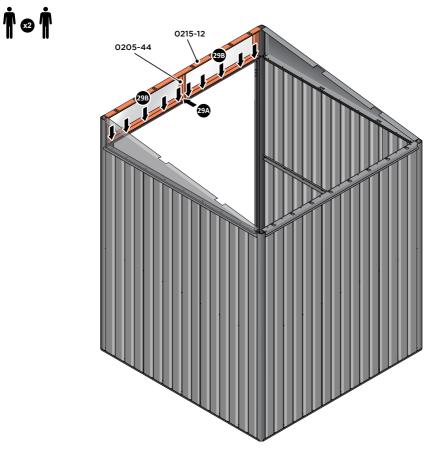




LOCATE AND SECURE WINDOW SUPPORT 0205-44 TO WINDOW ASSEMBLY 0215-12 AS SHOWN ABOVE.




SECURE WINDOW ASSEMBLY AT x10 LOCATIONS INDICATED AS SHOWN ABOVE.


LOCATE AND SECURE ROOF FRONT INFILLS 0215-12.

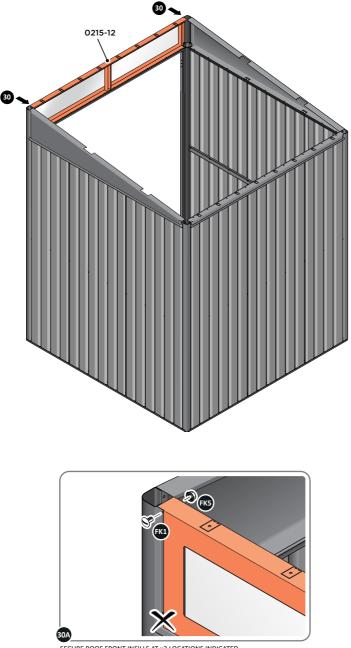


SECURE ROOF FRONT INFILLS AT x2 LOCATIONS INDICATED.

LOCATE AND SECURE TOP RAIL CORNER BRACKETS 0203-15.

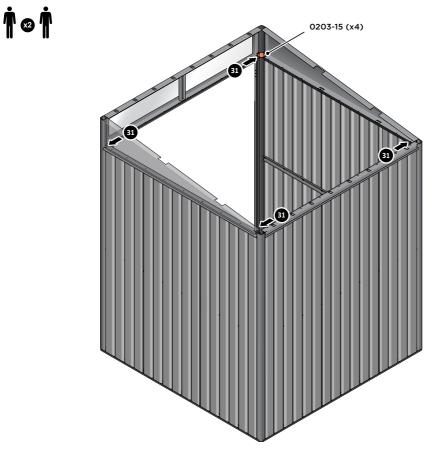





LOCATE AND SECURE TOP RAIL CORNER BRACKETS 0203-15 IN EACH CORNER OF THE SHED USING THE TYPICAL FIXING METHOD SHOWN ABOVE.




SECURE EACH CORNER BRACKET AND ROOF INFILL AS SHOWN ABOVE.

LOCATE AND SECURE ROOF SUPPORTS 0212-13 AND 0212-14.

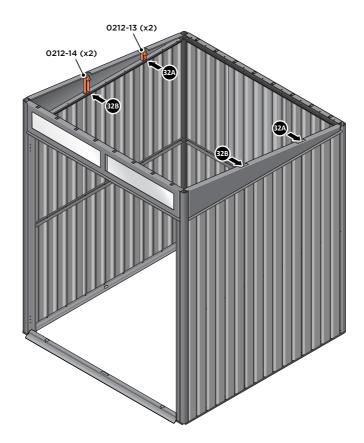





LOCATE AND SECURE SHORT ROOF SUPPORT 0212-13 AS SHOWN ABOVE.




LOCATE AND SECURE LONG ROOF SUPPORT 0212-14 AS SHOWN ABOVE.

LOCATE AND SECURE ROOF CHANNEL ASSEMBLY 0215-06.

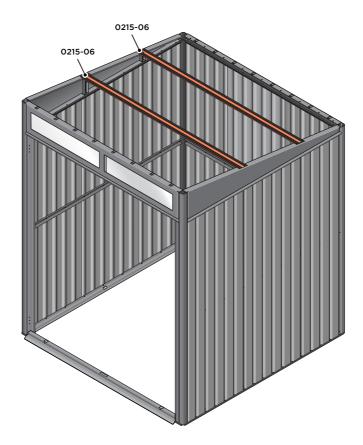




SLOT EACH ROOF CHANNEL ASSEMBLY 0215-06 INTO ROOF SUPPORT.




SECURE ROOF CHANNEL ASSEMBLY AT EACH FIXING POINT (x3 EACH SIDE) USING FASTENERS DETAILED ABOVE.

PUSH ROOF REAR AND FRONT INFILL AIR BEND TABS UPWARDS.












BEND ROOF REAR INFILL AIR BEND TABS UPWARDS IMPORTANT: DO NOT BEND PAST 45°.

LOCATE AND SECURE ROOF PANEL SIDE 0212-05 ONTO LEFT-HAND SIDE OF SHED.

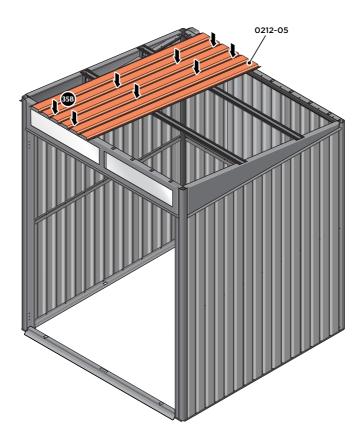





LOCATE A ROOF PANEL SIDE 0212-05 ALIGN WITH AIR BEND TABS AS INDICATED.




SECURE ROOF PANELS AT X8 LOCATIONS INDICATED USING TYPICAL FIXING METHOD. IMPORTANT: ENSURE RUBBER WASHER FK4 IS LOCATED AS SHOWN.

LOCATE AND SECURE ROOF PANEL SIDE 0212-07 ONTO LEFT-HAND SIDE OF SHED.

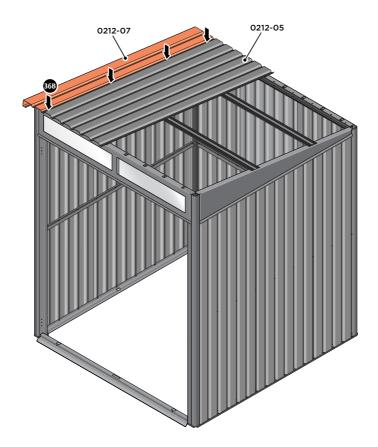





ALIGN AND OVERLAP ROOF PANEL 0205-07 WITH ROOF PANEL SIDE AS SHOWN. IMPORTANT: ENSURE PANELS ALWAYS OVERLAP AS SHOWN.





SECURE ROOF PANELS AT x 4 LOCATIONS INDICATED USING TYPICAL FIXING METHOD. IMPORTANT: ENSURE RUBBER WASHER FK4 IS LOCATED AS SHOWN.

LOCATE AND SECURE ROOF PANELS 0212-05.

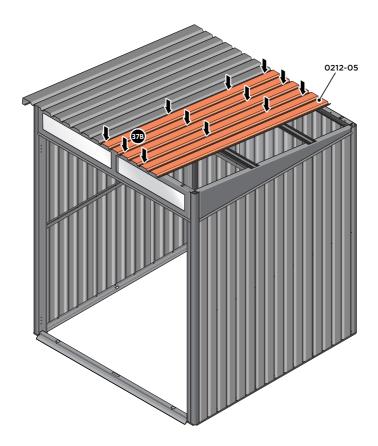









SECURE ROOF PANEL AT x12 LOCATIONS INDICATED USING TYPICAL FIXING METHOD. IMPORTANT: ENSURE RUBBER WASHER FK4 IS LOCATED AS SHOWN.

LOCATE ROOF PANEL SIDE 0212-07 ONTO RIGHT-HAND SIDE OF SHED.

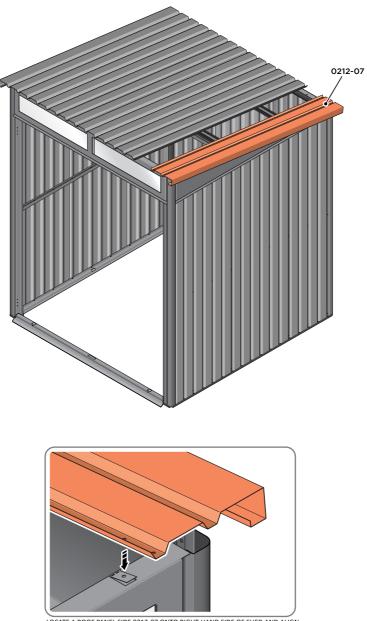


LOCATE A ROOF PANEL SIDE 0212-07 ONTO RIGHT-HAND SIDE OF SHED AND ALIGN WITH AIR BEND TABS AS INDICATED.


LOCATE AND SECURE SMALL ROOF PANEL 0212-06.

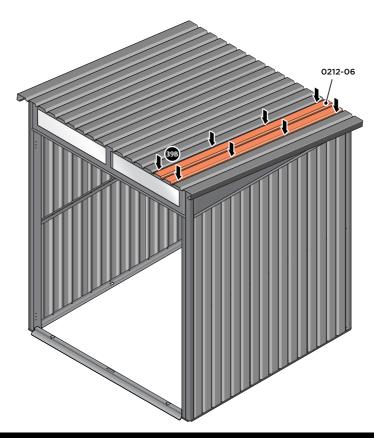







ALIGN AND OVERLAP SMALL ROOF PANEL 0212-06 WITH PREVIOUS ROOF PANEL AND ROOF PANEL SIDE.




SECURE ROOF PANEL AT x8 LOCATIONS INDICATED USING TYPICAL FIXING METHOD. IMPORTANT: ENSURE RUBBER WASHER FK4 IS LOCATED AS SHOWN.

LOCATE AND SECURE ROOF CAP 0215-03.

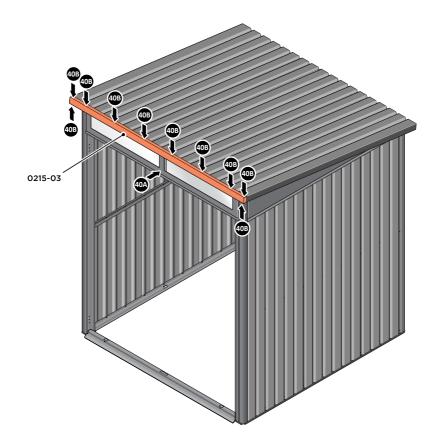




LOCATE ROOF CAP 0215-03 ONTO FRONT OF ROOF.





SECURE ROOF CAP AT x10 LOCATIONS INDICATED USING TYPICAL FIXING METHOD. PLEASE NOTE: THE FIXING USED IS A SELF DRILLING COMPONENT.

LOCATE AND SECURE ROOF GUTTER 0215-05.

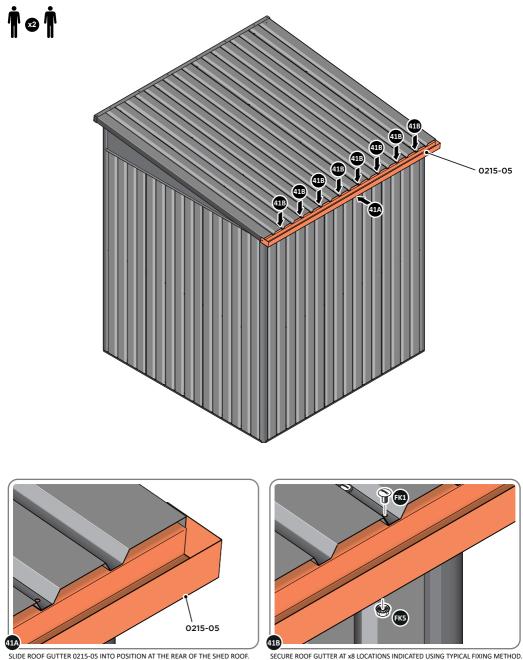



LOCATE AND SECURE REAR ROOF CAP 0215-04.

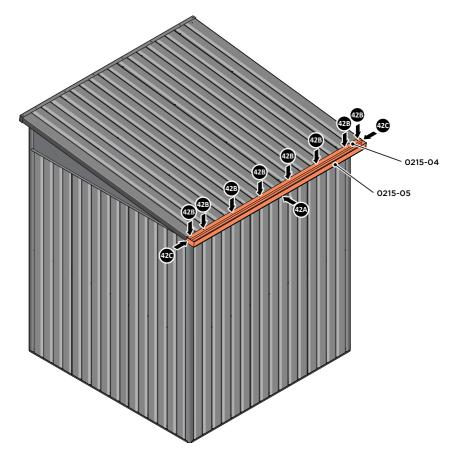




LOCATE REAR ROOF CAP 0215-04 ONTO REAR OF ROOF AS SHOWN ABOVE.







SECURE REAR ROOF CAP AT x8 LOCATIONS. SECURE SLIDE ROOF GUTTER 0215-05 AT x2 LOCATIONS. PLEASE NOTE: THE FIXING USED IS A SELF DRILLING COMPONENT.

DETERMINE WHICH SIDE DRAIN HOLE 0205-53 WILL BE LOCATED.

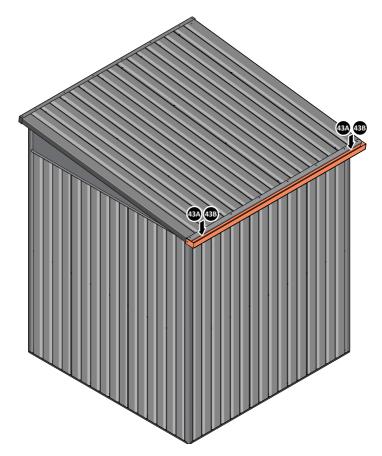





LOCATE AN OPEN GROMMET INTO THE ROOF GUTTER ABOVE WHERE THE DRAIN HOLE WILL BE LOCATED.




LOCATE CLOSED GROMMET INTO THE ROOF GUTTER ON THE OPPOSITE SIDE TO THE LOCATED DRAIN HOLE AS SHOWN ABOVE.

LOCATE AND SECURE RIGHT-HAND DOOR ASSEMBLY 0205-36 FURNITURE.

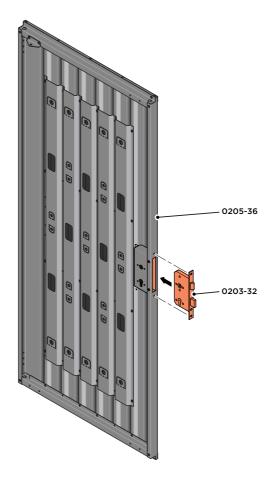




LOCATE EURO MORTICE LOCK 0203-32 RIGHT-HAND DOOR APERTURE AS SHOWN.




SECURE EURO MORTICE LOCK 0203-32 AT x2 LOCATIONS INDICATED ABOVE. SEE FOLLOWING DATA SHEET FOR COMPLETION OF MORTICE LOCK INSTALLATION

ASSEMBLY STAGE 44 CONTINUED


LOCATE AND SECURE RIGHT-HAND DOOR ASSEMBLY 0205-36 FURNITURE.




LOCATE AND SECURE EURO ESCUTCHEON 0203-34 AS SHOWN.




LOCATE EURO CYLINDER 0203-36 INTO DOOR APERTURE. IMPORTANT: ENSURE COVER IS FITTED AS SHOWN.




LOCATE AND SECURE DOOR HANDLE ASSEMBLY 0203-33 AS SHOWN.



LOCATE EURO ESCUTCHEON COVER 0203-34 ONTO EURO ESCUTCHEON AS SHOWN. PLEASE NOTE: THESE ARE PUSHED ON AND WILL CLICK INTO PLACE.





SECURE EURO CYLINDER 0203-36 AS SHOWN ABOVE. PLEASE NOTE: FIXING IS PART OF THE EURO MORTICE LOCK ASSEMBLY.




LOCATE COVER ONTO DOOR HANDLE AS SHOWN. PLEASE NOTE: THESE ARE PUSHED ON AND WILL CLICK INTO PLACE.

LOCATE AND SECURE LEFT-HAND DOOR ASSEMBLY 0205-37 FURNITURE.

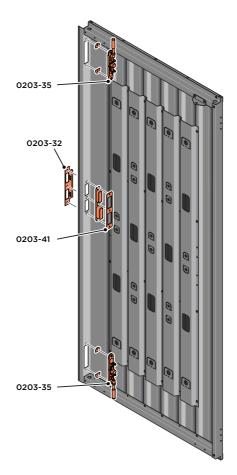



ENSURE THE PLUNGER INDICATED IS FACING THE BOTTOM OF THE DOOR, LOCATE AS SHOWN ABOVE AND SECURE USING ADJACENT FIXING METHOD.




SECURE EACH FLUSH DOOR BOLT ENSURING PLATE PACKER 0203-40 IS LOCATED AS SHOWN ABOVE.

45D

ASSEMBLY STAGE 45 CONTINUED


LOCATE AND SECURE LEFT-HAND DOOR ASSEMBLY 0205-37 FURNITURE.







ENSURE FLUSH DOOR BOLT OPENS AND CLOSES.

REPEAT 45A / B / C FOR UPPER FLUSH DOOR BOLT LOCATE AND SECURE UPPER FLUSH DOOR BOLT 0203-35 USING PROCEDURES 45A / B / C, PLUNGER WILL FACE UPWARDS TOWARDS THE TOP OF THE DOOR






LOCATE AND SECURE EURO MORTICE LOCK 0203-32 AND CATCH PLATE COVER 0203-41 AS SHOWN ABOVE.




SECURED EURO MORTICE LOCK 0203-32 AS SEEN FROM FRONT.


LOCATE AND SECURE A DOOR GROMMET 0203-57 AT EACH LOCATION INDICATED.

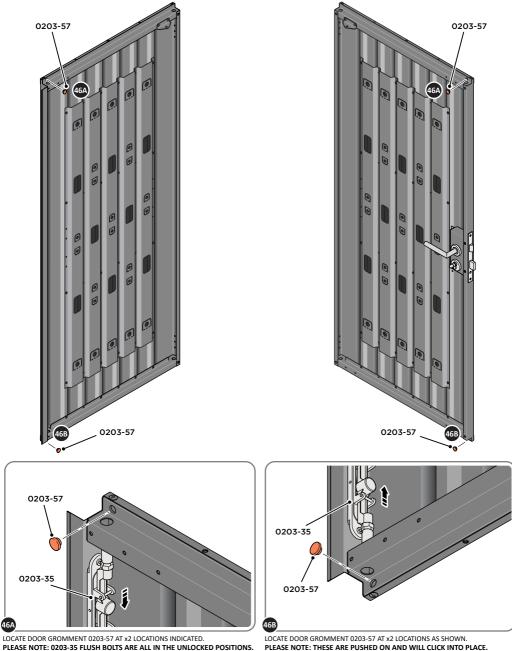


PLEASE NOTE: 0203-35 FLUSH BOLTS ARE ALL IN THE UNLOCKED POSITIONS.

LOCATE AND SECURE DOOR HINGES ONTO DOOR ASSEMBLIES.

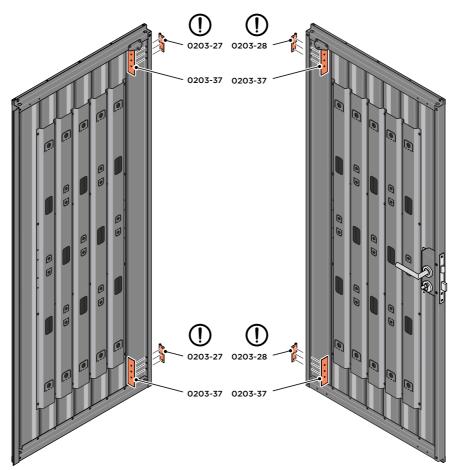




LOCATE DOOR HINGE PLATE 0203-37 WITHIN DOOR AS SHOWN.





SECURE DOOR HINGE PLATE AND HINGE 0203-27 AND 0203-28 AS SHOWN. IMPORTANT: ENSURE CORRECT DOOR HINGE IS SECURED TO CORRECT DOOR.

LOCATE AND SECURE DOOR HINGE 0203-27 & PLATE 0202-39 ONTO LEFT-HAND DOOR POST.

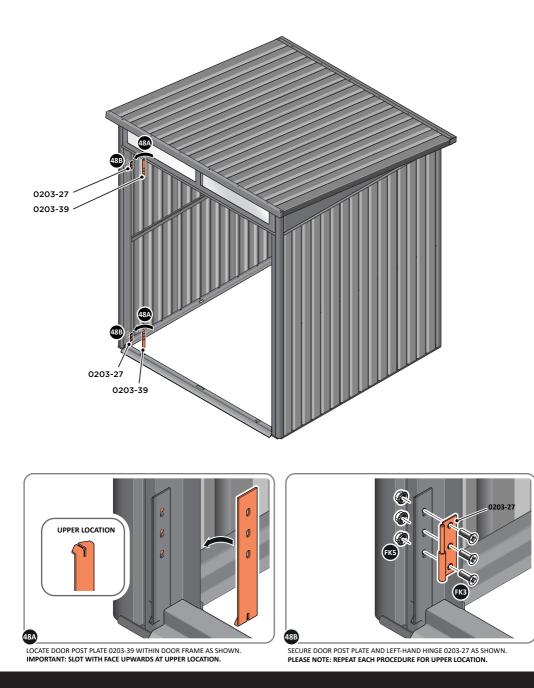


LOCATE AND SECURE DOOR HINGE 0203-28 & PLATE 0202-39 ONTO RIGHT-HAND DOOR POST.

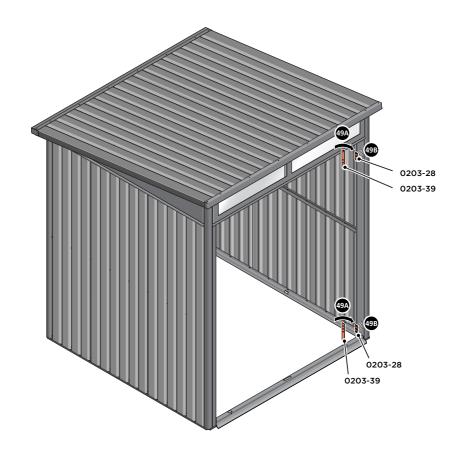




LOCATE DOOR POST PLATE 0203-39 WITHIN DOOR FRAME AS SHOWN. IMPORTANT: SLOT WITH FACE UPWARDS AT UPPER LOCATION.




SECURE DOOR POST PLATE AND RIGHT-HAND HINGE 0203-28 AS SHOWN. PLEASE NOTE: REPEAT EACH PROCEDURE FOR UPPER LOCATION.

SECURE A GAS STRUT BALL JOINT 0205-68 ONTO EACH GAS STRUT BRACKET 0205-66.




DETERMINE DOOR OPENING ANGLE: A: 90° OPENING OR B: 120° OPENING





HOLES, SECURE USING TYPICAL FIXING METHOD ABOVE.

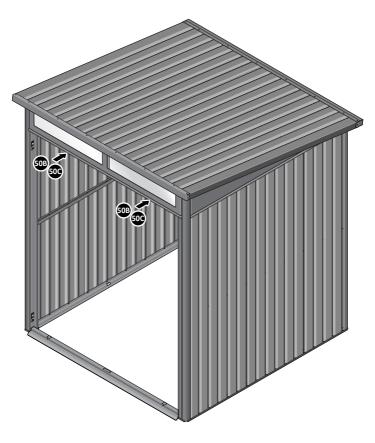


LOCATE AND SECURE GAS STRUT BRACKETS 0205-66.

LOCATE DOOR ASSEMBLIES ONTO HINGES.







SLIDE EACH DOOR ASSEMBLY ONTO EACH OF THEIR RESPECTIVE HINGES.




ASSEMBLED DOOR HINGE.

LOCATE AND SECURE GAS STRUT 0205-63 .

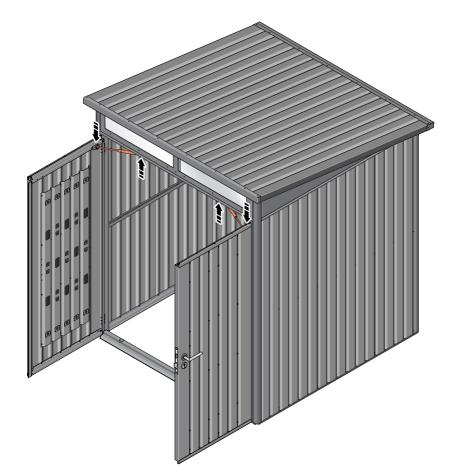




SECURE A GAS STRUT BALL JOINT 0205-68 ONTO EACH GAS STRUT BRACKET THAT IS PRE-RIVETED ONTO EACH DOOR ASSEMBLY.



FIX EACH GAS STRUT 0205-63 ONTO RELEVANT GAS STRUT BALL JOINTS. PLEASE NOTE: PUSHES DOWN ON DOOR AND UPWARDS ON DOOR FRAME.


LOCATE AND SECURE SHELF ASSEMBLY 0205-38.

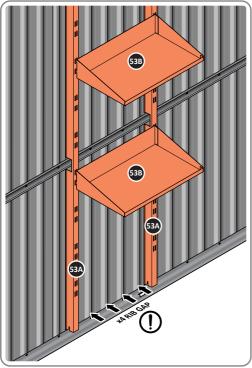


THE SHELF ASSEMBLY CAN BE LOCATED AS DESIRED, PLEASE DETERMINE THE MOST SUITABLE LOCATION AND ASSEMBLE AS SHOWN IN FIG.53A & 53B.

ASSEMBLY STAGE 54


LOCATE TOOL HANGERS 0205-39 WITHIN SHED AS DESIRED LOCATION.



HOOK EACH TOOL HANGER 0205-39 ONTO ROOF FRAME AT DESIRED LOCATION.



SLIDE SHELF POST UP INTO ROOF FRAME, ONCE THERE IS ENOUGH CLEARANCE AT THE BOTTOM LOCATE SHELF POST OVER FLOOR FRAME AND LOWER.



LOCATE EACH SHELF 0205-38-02 ONTO SHELF POST AS DESIRED. PLEASE NOTE: THE SHELF SIMPLY HOOKS ONTO THE POST.



NOTES

NOTES

Your **HEX Living product** is designed to stand the test of time, which is why we're happy to offer a **lifetime warranty** on our products. With zero maintenance required, simply assemble your HEX Living product, and enjoy putting it to great use in your garden.

Periodically, you might want to give your product a clean, these simple care tips are not essential to the performance of your product:

- Remove surface dirt with plain water using a jet wash or sponge, the coating on our products will ensure dirt or mud simply wipes away.
- If you've purchased a HEX Living metal storage solution, periodically clear the roof of fallen leaves.
- If your product has guttering, remove leaves and garden debris as you would on your home.

Ensure you have registered your HEX Living product

Using the unique serial number found on the cover of this document, please visit **www.hexliving.co.uk** to register your product and access the HEX Living lifetime warranty and video instructions.

Customer Service: +44 (0) 1889 272 056





