




Buckley Outdoor Kitchen Assembly Guide Manual

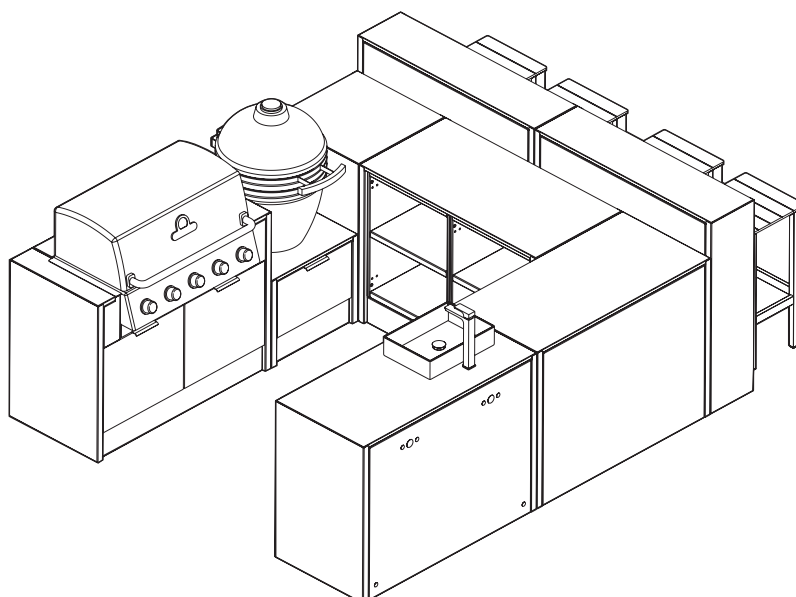

Customer Service: +44 (0) 1889 272 056

IMPORTANT: PLEASE REGISTER YOUR HEX LIVING PRODUCT AFTER ASSEMBLY

Using the unique serial number, simply register your product at **www.hexliving.co.uk** or use the QR code above to access the HEX Living lifetime warranty and online support.

Affix Serial Number
HERE

Contents

1.	Introduction and Routine Cleaning	3
2.	Step-by- step Assembly Guidelines	3
3.	Site Preparation and Utility Access Holes	4
4.	Check List - Unpacking Your Kitchen	4
5.	Preparing for Installation and Cabinet Screw-in Feet Adjustment	5
6.	Joining of Cabinet Installation	6
7.	Cabinet Door and Hinges Installation	7
8.	Shelf Installation	8
9.	Worktop Installation	9
10.	Bar Unit Installation	10
11.	Sink Unit Installation	11
12.	Cooler Unit Installation	12
13.	BBQ Unit Installation	13
14.	Kamado Unit Installation	14
15.	Limited Warranty	15
16.	Part List and Tools Required	15

IMPORTANT: KEEP THIS MANUAL FOR FUTURE REFERENCE.

1. Introduction and Routine Cleaning

Like all outdoor products, your Buckley kitchen has to prevail against varying weather conditions. With this in mind, caring for your outdoor kitchen is extremely important. Rest in confidence, our kitchens have been designed using top quality materials, to stand up to all British weather. However, to protract the lifespan of your kitchen, regular maintenance is recommended, this ensures that your outdoor kitchen is always looking in excellent condition all the time.

Routine Cleaning:

For porcelain work surfaces and metal work, a simple wipedown with a sponge, warm water and a mild detergent (soapy liquid) will be sufficient before every use. Any spills such as, food, wine and sauces should be removed speedily to avoid any long-term staining.

2. Step-by- step Assembly Guidelines

This manual has been designed to give specific information on how to assembly your new kitchen, you'll find step-by-step instructions to make sure your kitchen is installed correctly. Make sure you have the correct tools at hand and some drilling will be required!

Although our kitchens are designed to be as simple as possible for you to assembly yourself, please take into consideration some pumping, gas and electrical installation will be require on certain products.

We can offer you our own installation service by ringing our customer service team on +44 (0) 1889 272 056 or seek a local professional for assistance.

Please read these instructions carefully prior to assembly and use.

- Make sure all plastic protection is removed before assembling.
- Assembly of the product involves some large components; it is advisable to have two people assemble the unit.
- Find a large, clean area to assemble your product.
- Assembly should be carried out on an open, flat, level surface.
- Please refer to the parts list and assembly diagram as necessary.
- To avoid losing any small component or hardware, assemble your product on a hard level surface that does not have cracks or openings.
- To prevent any possible damage to the flooring structure, ensure this product is correctly lifted, whilst been moved from one position to another.
- Follow all steps in order to properly assemble your product.
- Wear correct safety gloves and glasses. Edges and corners can cause minor cuts if improperly handled during assembly, some drilling will be required.
- Do not force parts together as this can result in damage to the product.
- When applicable, tighten all components by hand first. Once all steps are completed, go back and fully tighten till firmly secure with the recommended handtool.

Replacement Parts

Please contact customer services for any replacement parts. +44 (0) 1889 272 056

3. Site Preparation and Utility Access Holes

The first stage of installing a kitchen is preparation and ensuring the area is clean, has a level solid surface, all (NG) gas, plumbing and electrics services are in a safe and convenient location. Your utility kitchen cabinets match-up to your service connection points. Layouts may require cabinets to be modified to allow access for supplies. With this in mind our Buckley outdoor kitchen cabinets have pre-drilled holes in the rear panel and through the floor. Removal plastic covers can be removed if your connecting from the rear. Any un-needed packaging should be placed in the bin or recycled.



PRIOR TO ASSEMBLY:

PLEASE READ THIS GUIDE THOROUGHLY, BEFORE BEGINNING THE ASSEMBLY AND CHECK THAT YOU HAVE ALL THE CORRECT COMPONENTS.

INSURE ALL SERVICES (GAS, WATER, ELECTRICS) HAVE BEEN INSTALLED PRIOR TO YOUR KITCHEN INSTALLATION?


NOTE: IF YOU ARE INSTALLING A GAS BBQ, ENSURE THAT THE SITE AREA YOU HAVE CHOSEN IS WELL VENTILATED, AND A SAFE DISTANCE FROM ANY FLAMMABLE MATERIALS FOR EXAMPLE LOW HANGING TREES OR BUSHES. PRE-ASSEMBLED PARTS MUST NOT BE ALTERED BY THE USER.

IF FOR ANY REASON YOU NEED ASSISTANCE, CONTACT OUR CUSTOMER SERVICE TEAM ON +44 (0) 1889 272 056.

4. Check List - Unpacking Your Kitchen

Once your kitchen arrives, carefully check off your delivery to see everything is in order. Pay attention not to scratch, misplace any hardware and accessories whilst you unpack. We suggest using a none-scratch material to place all the doors and worktops on the ground.

Note: Take care when removing the cabinet off the pallet, by first removing the four shipping brackets secured by eight screws, as illustrated below.

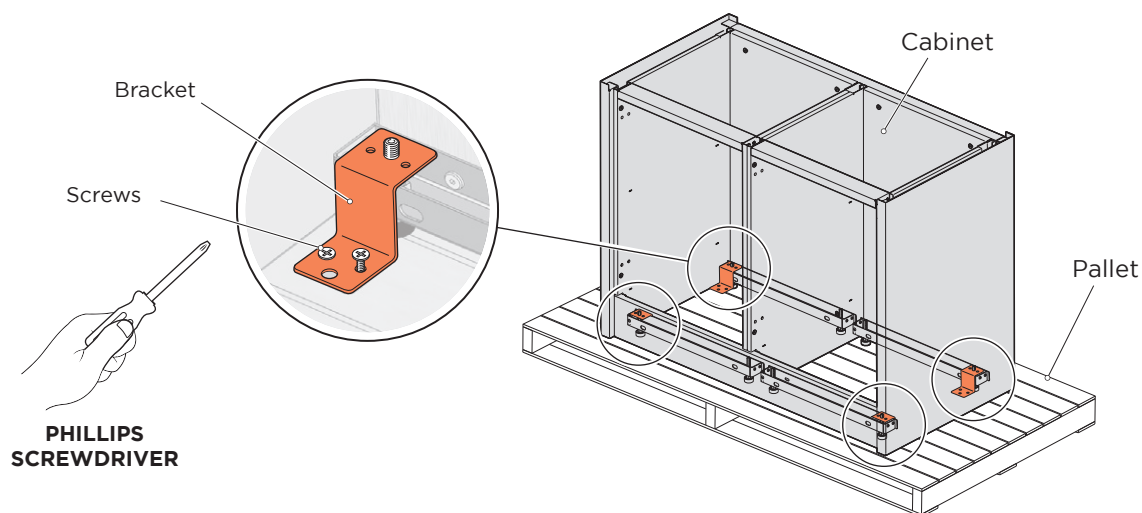

MOST PROCEDURES WILL NOT REQUIRE TWO PEOPLE BUT IT MAY BE EASIER TO HAVE ASSISTANCE.



PERSONAL PROTECTION EQUIPMENT


WE ADVISE APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT IS WORN DURING ASSEMBLY.



TOOL REQUIRED:
PHILLIPS SCREWDRIVER
HEAD



5. Preparing for Installation and Cabinet Screw-in Feet Adjustment

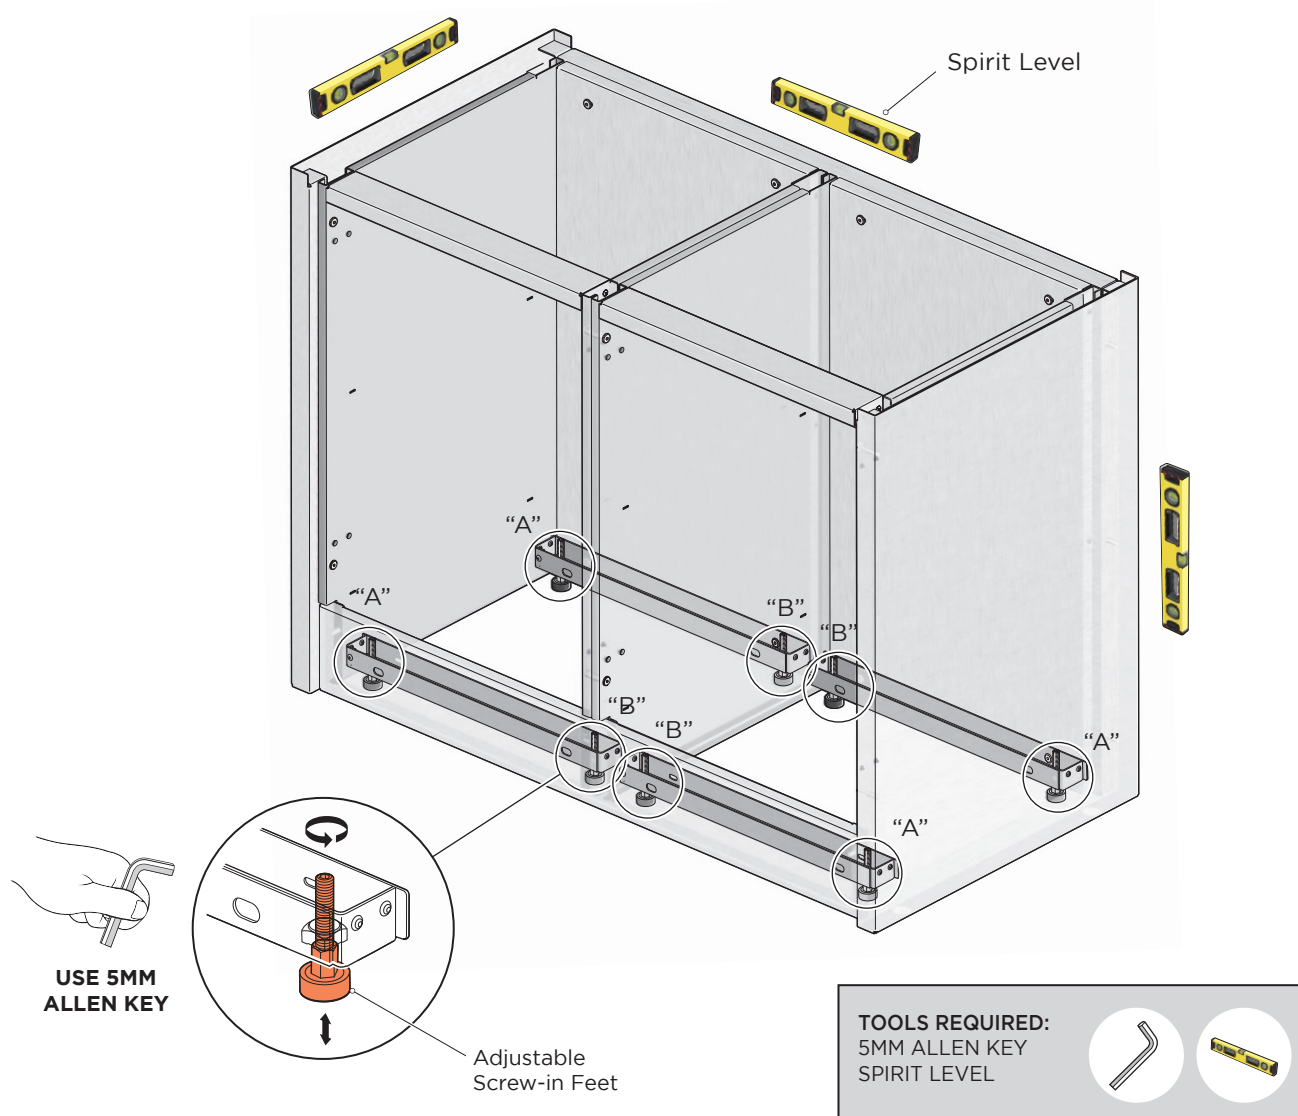

Step 1: Preparing for Installation

Begin by checking the levelness of your floor using a spirit level, we recommend you keep the floor gradient to an absolute minimum to ensure your kitchen is as level as possible. Identify high and low spots across the area where the cabinet will be installed. By starting off from the lowest point you can then adjust the outer cabinet screw-in feet "A" at the higher floor levels,

Note: Typically, contractors will advise you can use the industry standard ratio for fall of 1:80 as a minimal fall on your patio.

Step 2: Adjusting the Screw-in Feet

Initial Adjustment: Adjust all corner feet "A" at each location shown, to make the cabinet top level. Our adjustable feet can be twisted using a 5mm Allen key for precise height modifications.

Align and Repeat: Move the cabinet to its intended location and place a spirit level on top. Adjust each leg until the bubble indicates a perfectly level position. It is important to adjust each leg, so that the cabinet is level both front-to-back and side-to-side. Once all outer feet are level you can adjust the inner feet "B" if required.

If your floor area has got a greater fall than stated, we would strongly recommend that your Buckley Outdoor Kitchen is installed to simply run with the fall. Otherwise you will end up with a gap at one end which will potentially look unsightly. By doing this, it will help with prevention of water pooling.

Note: Another prevention to help stop water pooling, is having a smooth worktop surface finish, which requires a lot less fall, hence our material choice of smooth porcelain.


6. Joining of Cabinet Installation





CAUTION:

WHILST EVERY EFFORT HAS BEEN MADE IN THE MANUFACTURE OF YOUR APPLIANCE TO REMOVE ANY SHARP EDGE, YOU SHOULD HANDLE ALL COMPONENTS WITH CARE TO AVOID ACCIDENTAL INJURY.


M6 NYLOC NUT
M6 WASHER



BOLT
M6 X 20



USE 4MM
ALLEN KEY

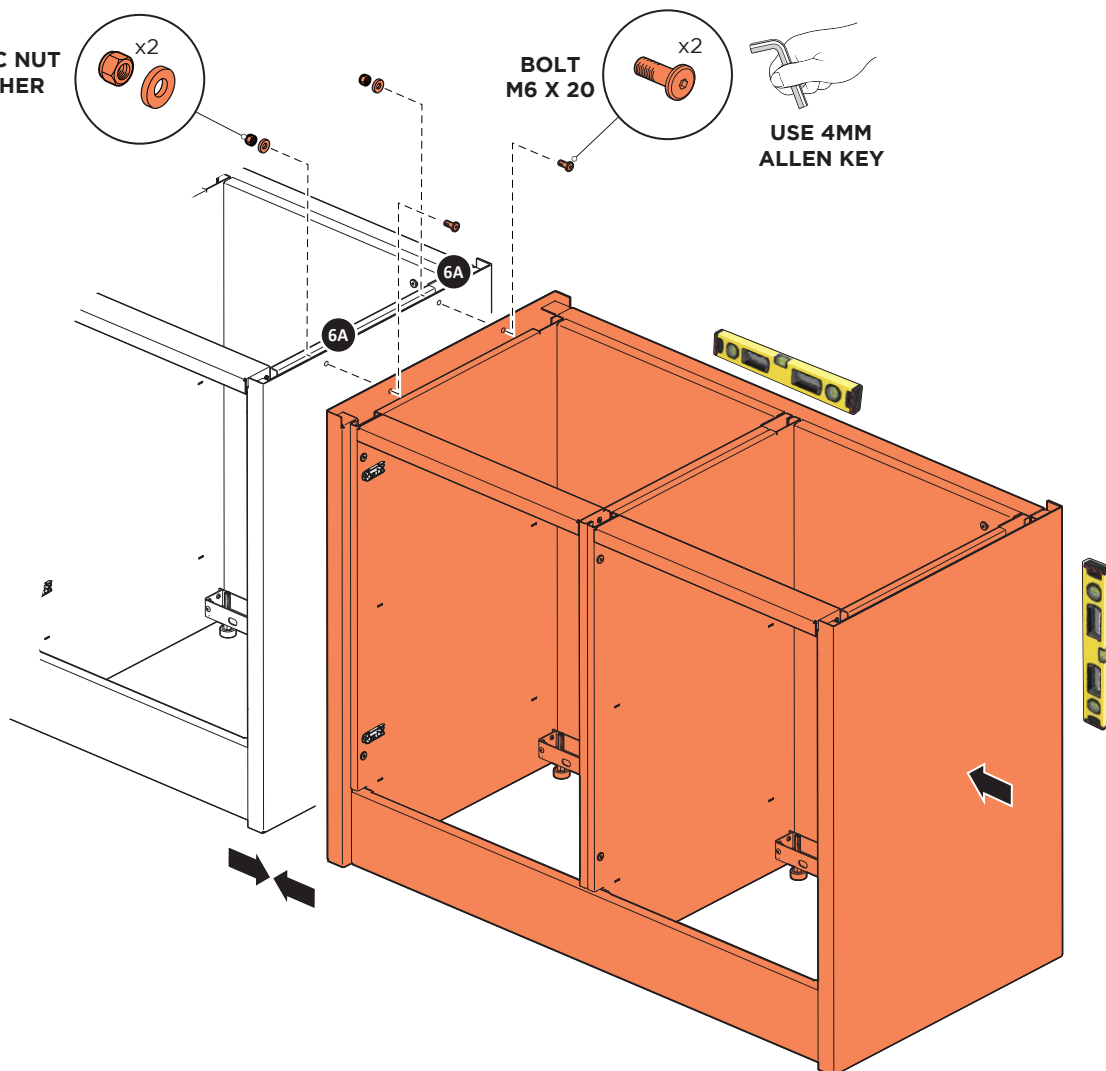


NOTE:


COMPLETED CABINETS ARE DIFFICULT TO MOVE AND COULD CAUSE INJURY AND DAMAGE TO THE PRODUCT.

TOOLS REQUIRED:

POWER DRILL
4MM ALLEN KEY
SPIRIT LEVEL

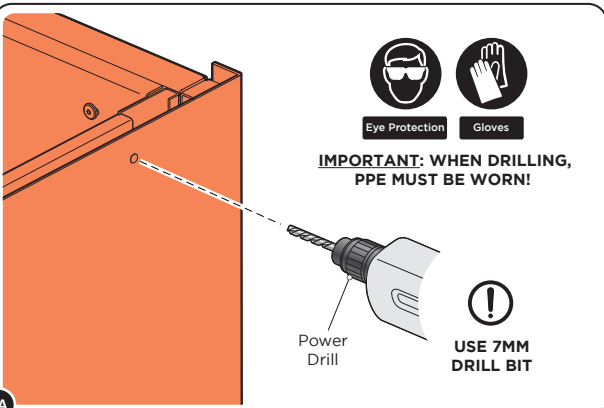

NOW YOU HAVE POSITIONED AND LEVELLED THE FIRST CABINET, TO JOIN A SECOND CABINET. MARK AND DRILL TWO HOLES 7MM THROUGH THE OUTSIDE SKIN SIDE PANEL, AT LOCATIONS SHOWN, USING THE JIG PROVIDED.

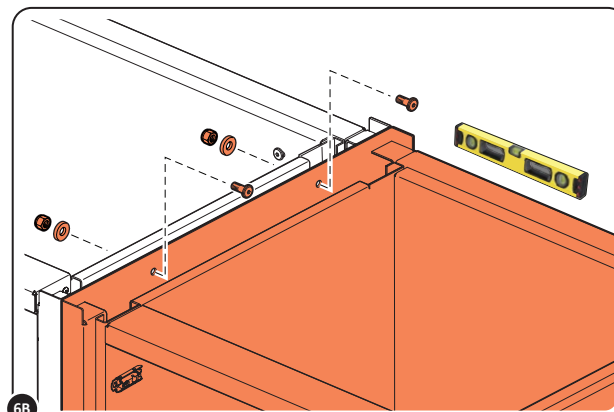

LOCATE SECOND PANEL, POSITION AND LEVEL, FOLLOWING PREVIOUS INSTRUCTIONS. DRILLING TWO HOLES 7MM FROM OUTSIDE SIDE MATING PANEL, LOCATE AND SECURE USING FIXING KIT PROVIDED, FULLY TIGHTEN.

7. Cabinet Door and Hinges Installation


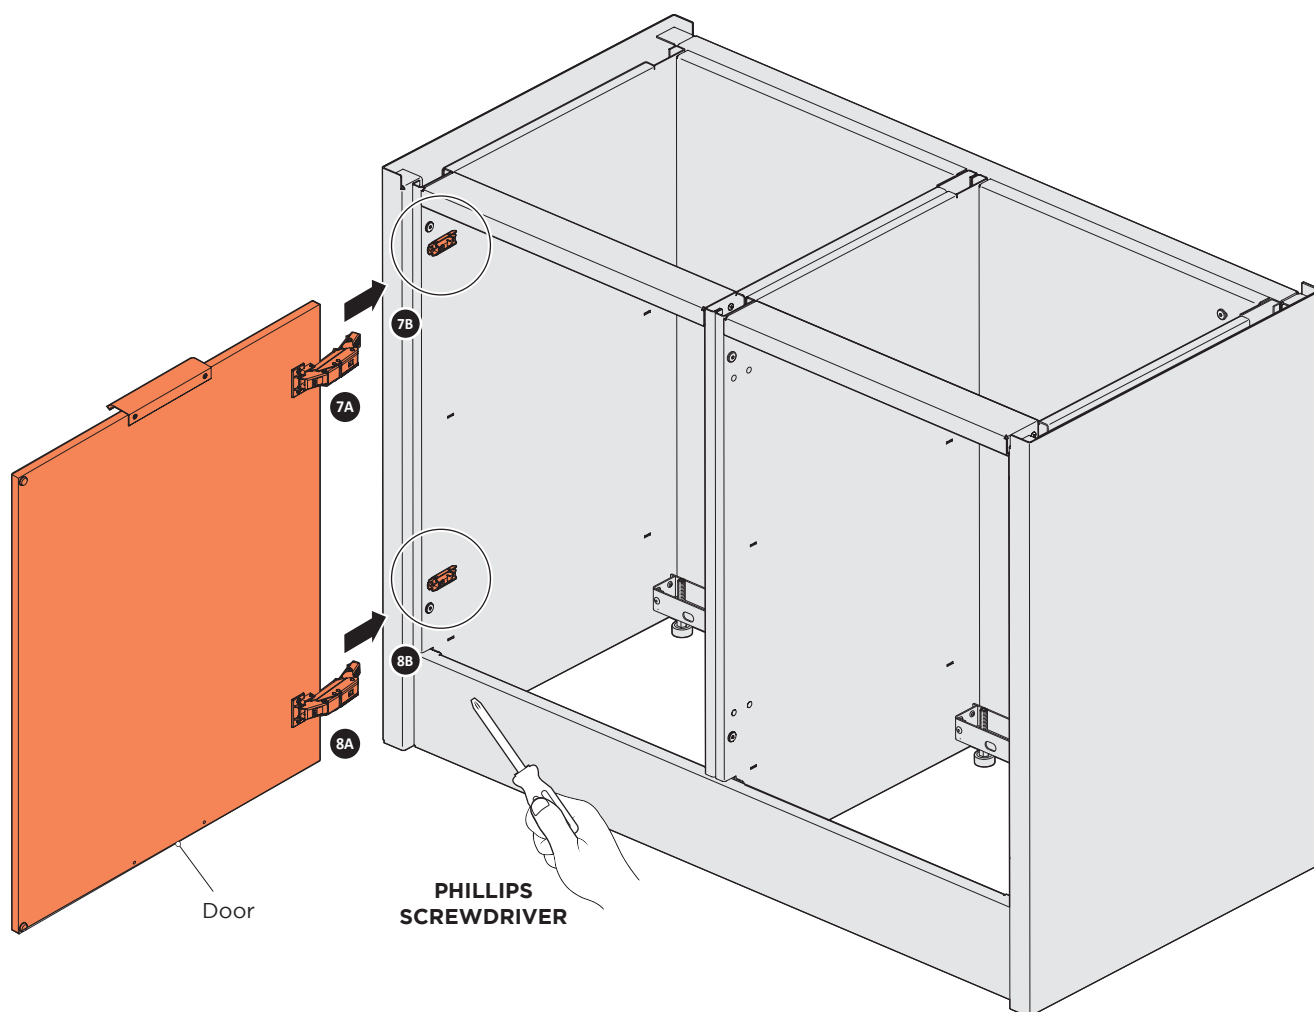


FIG.1

Hinge Plate



Remove Rubber
Expansion Plug
for Metal Doors

8A

FIG.2

Mounting Plate





FIG.1 ENSURE THAT DOORS ARE PLACED ON FLAT SCRTCH FREE SURFACE, WHILE FITTING DOOR HINGES.


NOTE: ON METAL DOORS REMOVE REAR EXPANSION PLUG FIRST.
FIG.2 ATTACH MOUNTING PLATE IN THR CORRECT ORIENTATION USING FIXING SCREWS PROVIDE, FULLY TIGHTEN. AS SHOWN ABOVE.

TOOL REQUIRED:
PHILLIPS SCREWDRIVER
HEAD

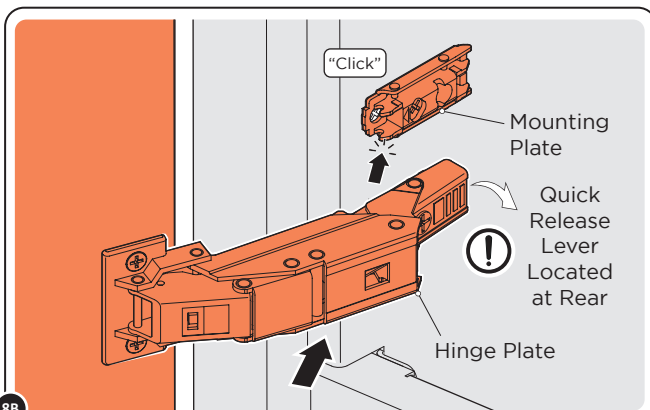



LOCATE CABIN DOOR AND ATTACH DOOR HINGE PLATE TO INSIDE FRONT END MOUNTING PLATE, USING A PUSH AND CLICK MOTION, AT LOCATION SHOWN ABOVE. **NOTE:** DOOR REMOVAL, USE QUICK RELEASE LEVER.

**SMOOTH
CLOSING
SWITCH**





Smooth Closing
Door Switch
On / Off

**SIDE
ADJUSTMENT
SCREW**

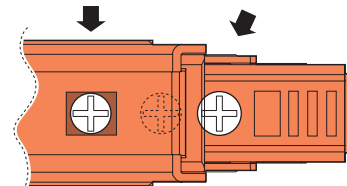

**DEPTH
ADJUSTMENT
SCREW**



8C

IF REQUIRED ADJUST DOOR POSITION, USE ADJUSTING SCREWS ON THE HINGE PLATE, AS SHOWN ABOVE.

NOTE: OPTIONAL ON / OFF SMOOTH CLOSING DOOR SWITCH.

8. Shelf Installation


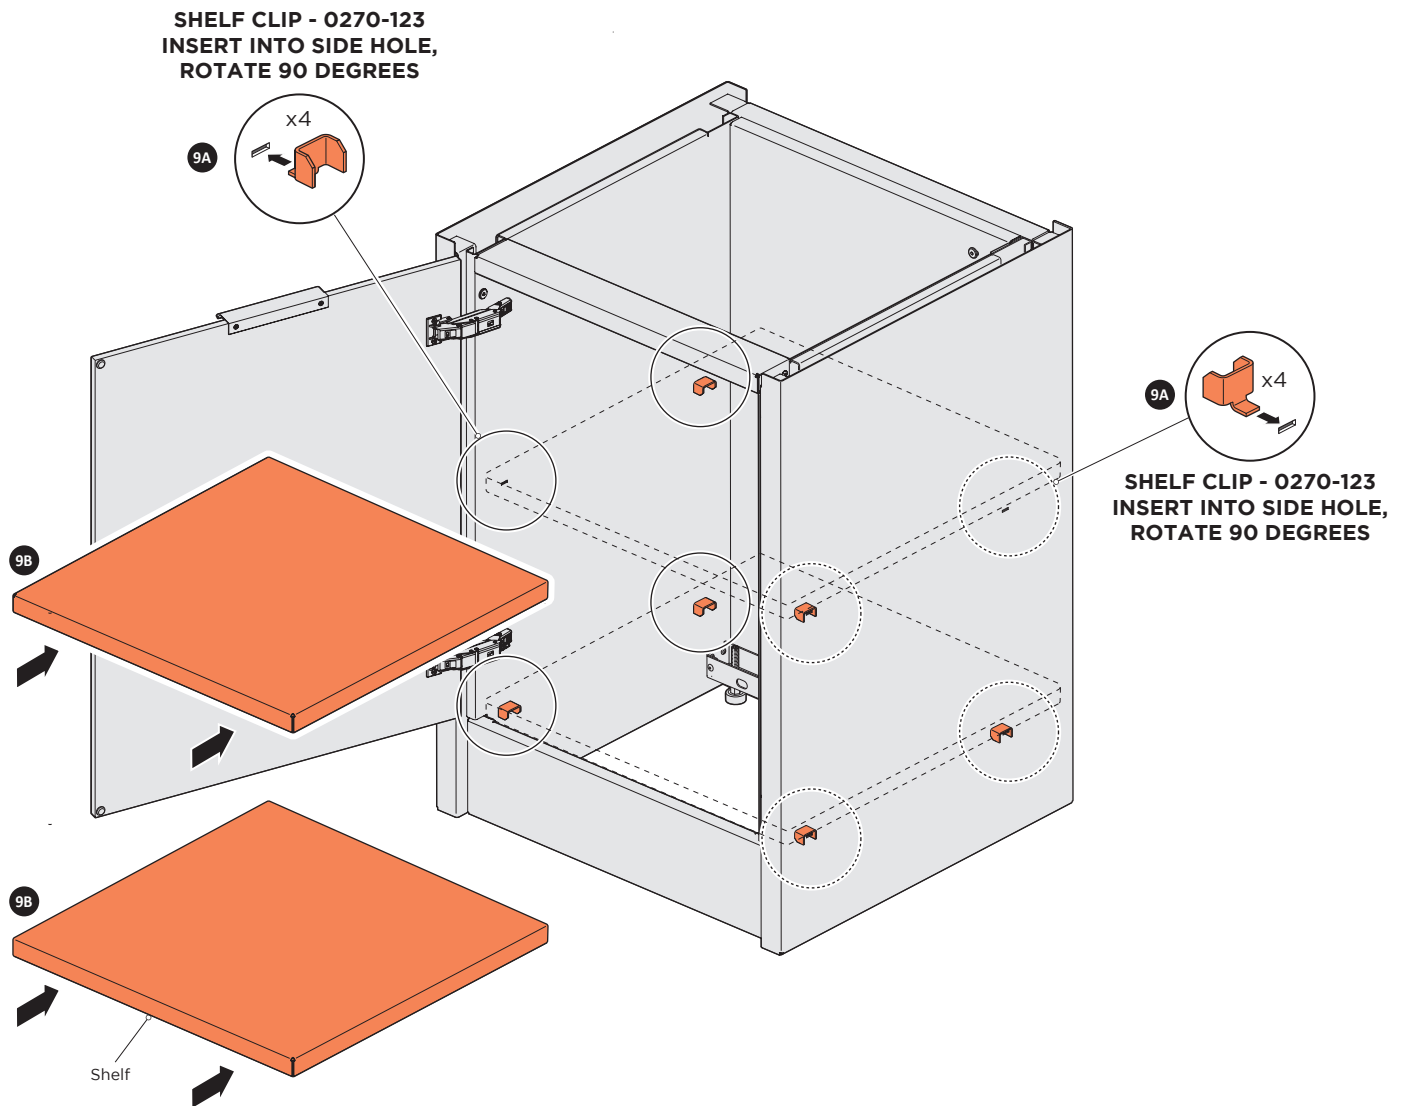


FIG.3

**INSERT SUPPORT CLIP
INTO EACH OF THE SHELF
ANCHORING POINTS**



9A

FIG.4

**90 DEGREE DOWNWARD
ROTATION**



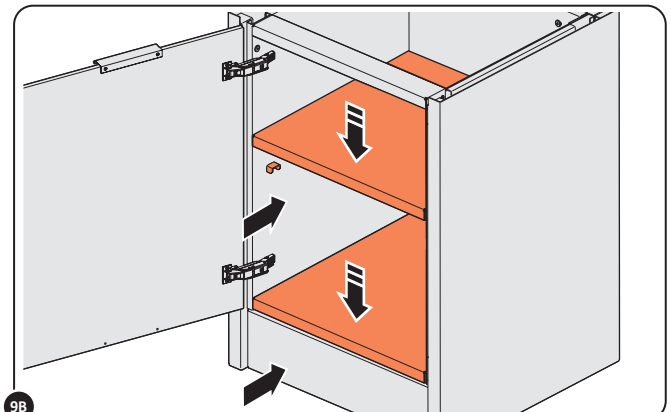


FIG.3 LOCATE SHELF SUPPORT CLIPS X4 PER SHELF, SIMPLY SECURE THE CLIPS LOCKING TAB AT EACH ANCHORING POINT. FIG.4 USING A 90 DEGREE DOWNWARD ROTATION TO SECURE INTO POSITION.


LOCATE FLOOR SHELF AND CAREFULLY SLIDE INTO POSITION, RESTING ON LOWER SHELF CLIPS X4, REPEAT PROCEEDER FOR UPPER SHELF, AS SHOWN ABOVE.

9. Worktop Installation


APPLY SEALANT TO HIGHLIGHTED AREAS, TO HELP SECURE WORKTOP TO CABINET. MINOR AJUSTMENT MAYBE REQUIRED TO LEVEL TOP, USING A SPIRIT LEVEL

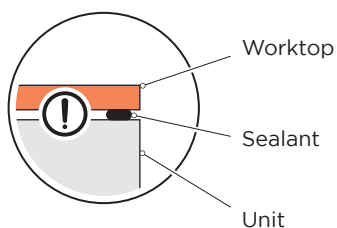

TYPICAL SINGLE 600 X 600 UNIT

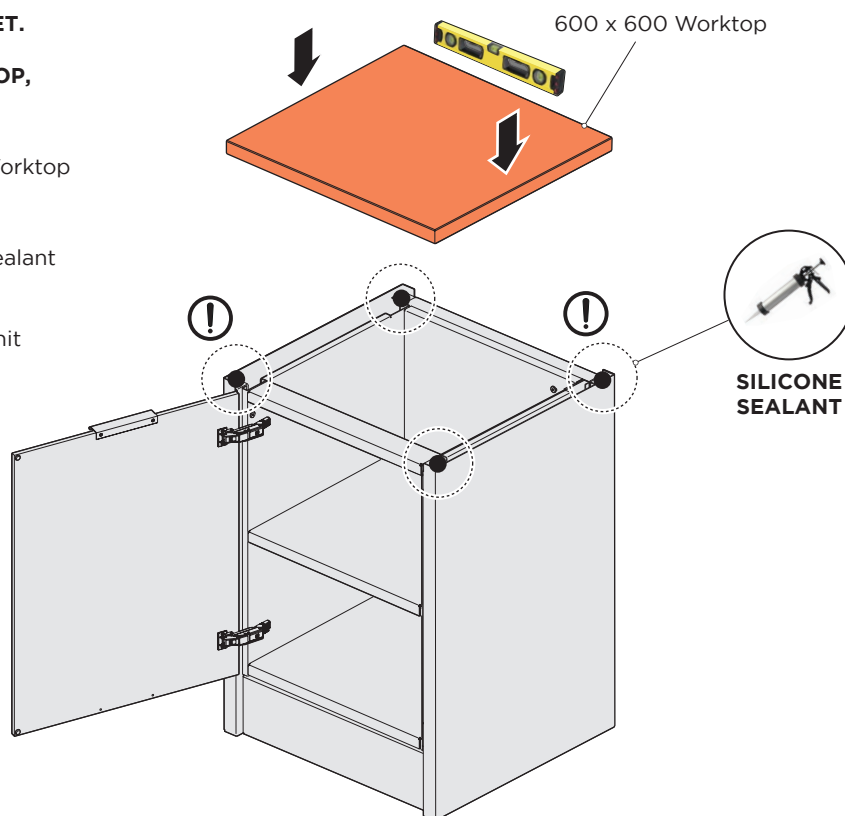


TYPICAL DOUBLE 1200 X 600 UNIT

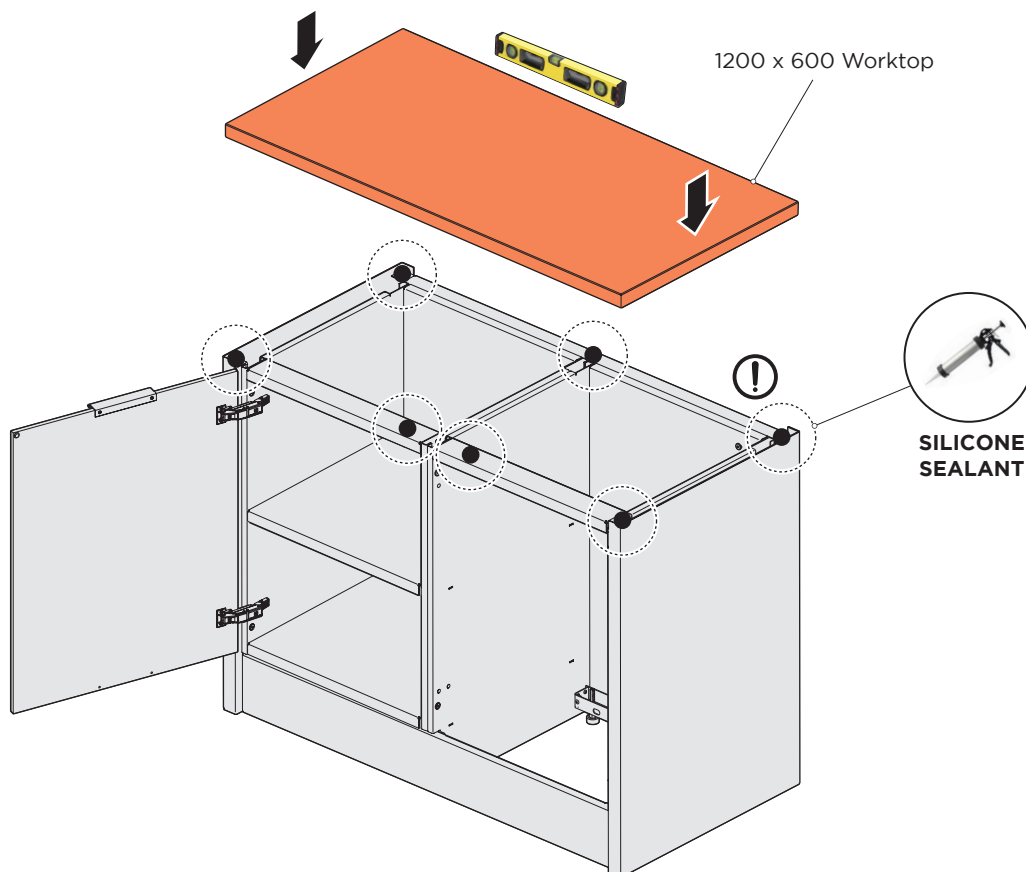

TOOL REQUIRED:
SEALANT & GUN



10. Bar Unit Installation

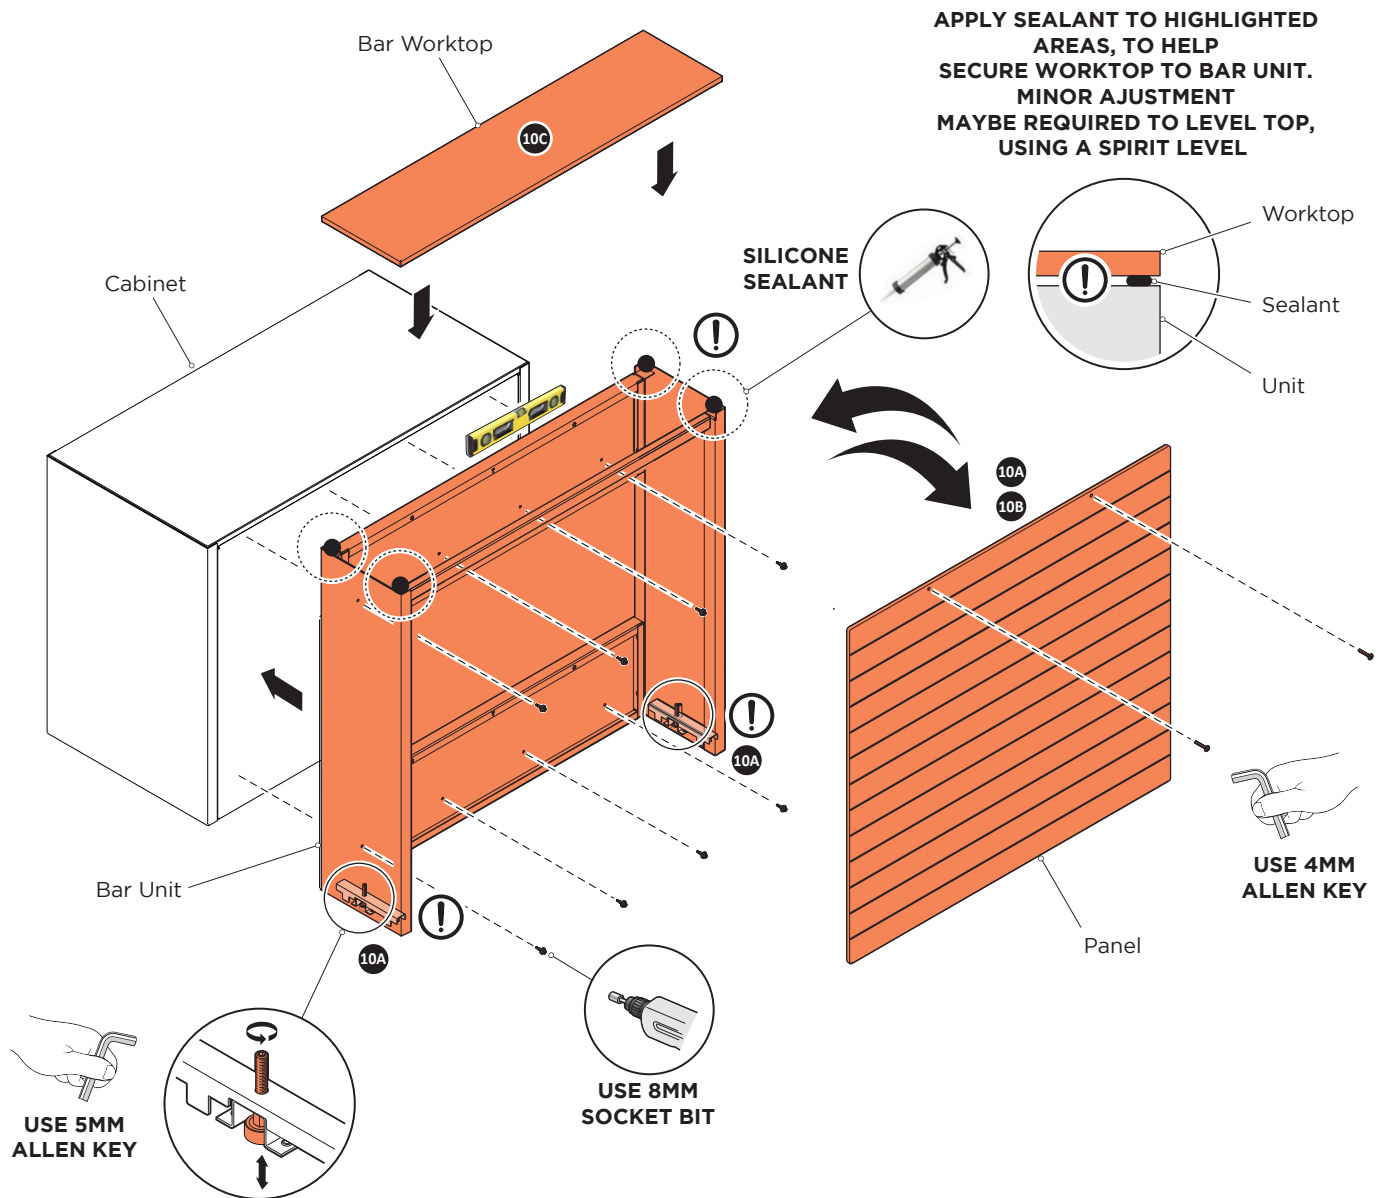


TOOLS REQUIRED:
POWER DRILL
4 & 5MM ALLEN KEY
SPIRIT LEVEL
SEALANT & GUN




Eye Protection

Gloves


IMPORTANT: WHEN DRILLING, PPE MUST BE WORN!

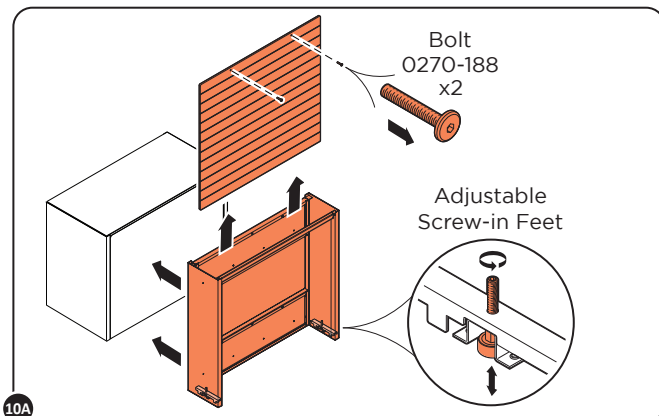

LOCATE BAR UNIT AND POSITION TO REAR SIDE OF CABINET, **NOTE:** CHECK UNIT IS LEVEL, IF REQUIRED ADJUST FEET AT EITHER SIDE. REMOVE PANEL BY UNCREWING BOLT FIXINGS 0270-188 AND REMOVE PANEL LIFTING UPWARDS.

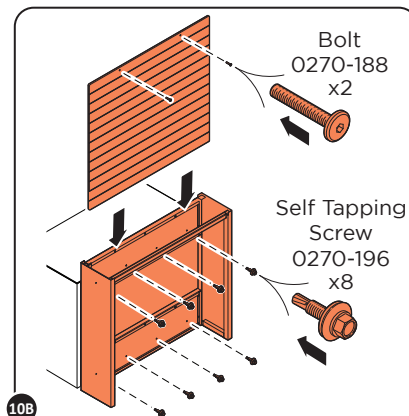

SECURE BAR UNIT TO CABINET USING SELF TAPPING SCREWS 0270-196 X8 LOCATIONS. REPOSITION PANEL FROM THE TOP, SECURE WITH BOLT FIXINGS 0270-188. FINALLY LOCATE BAR WORKTOP AND SECURE WITH SEALANT, AS SHOWN ABOVE.

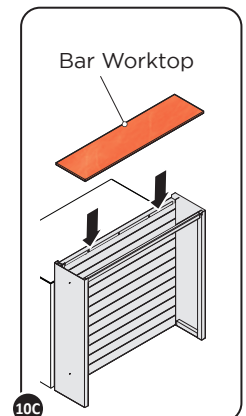

11. Sink Unit Installation




PRIOR TO ASSEMBLY:


REMEMBER TO TAKE CARE WHEN UNPACKING, PLEASE KEEP YOUR WORKSPACE CLEAN, CLEAR AND TIDY WHEN WORKING. UNNEEDED CARDBOARD AND PLASTICS SHOULD BE BINNED AND RECYCLED.

NOTE: WE RECOMMEND ALL WATER CONNECTIONS MUST BE FITTED BY A QUALIFIED PROFESSIONAL, ACCORDING TO VALID LOCAL SAFETY REGULATIONS.

ALWAYS USE THE USER MANUAL ASSEMBLY INSTRUCTIONS FOR HELP.

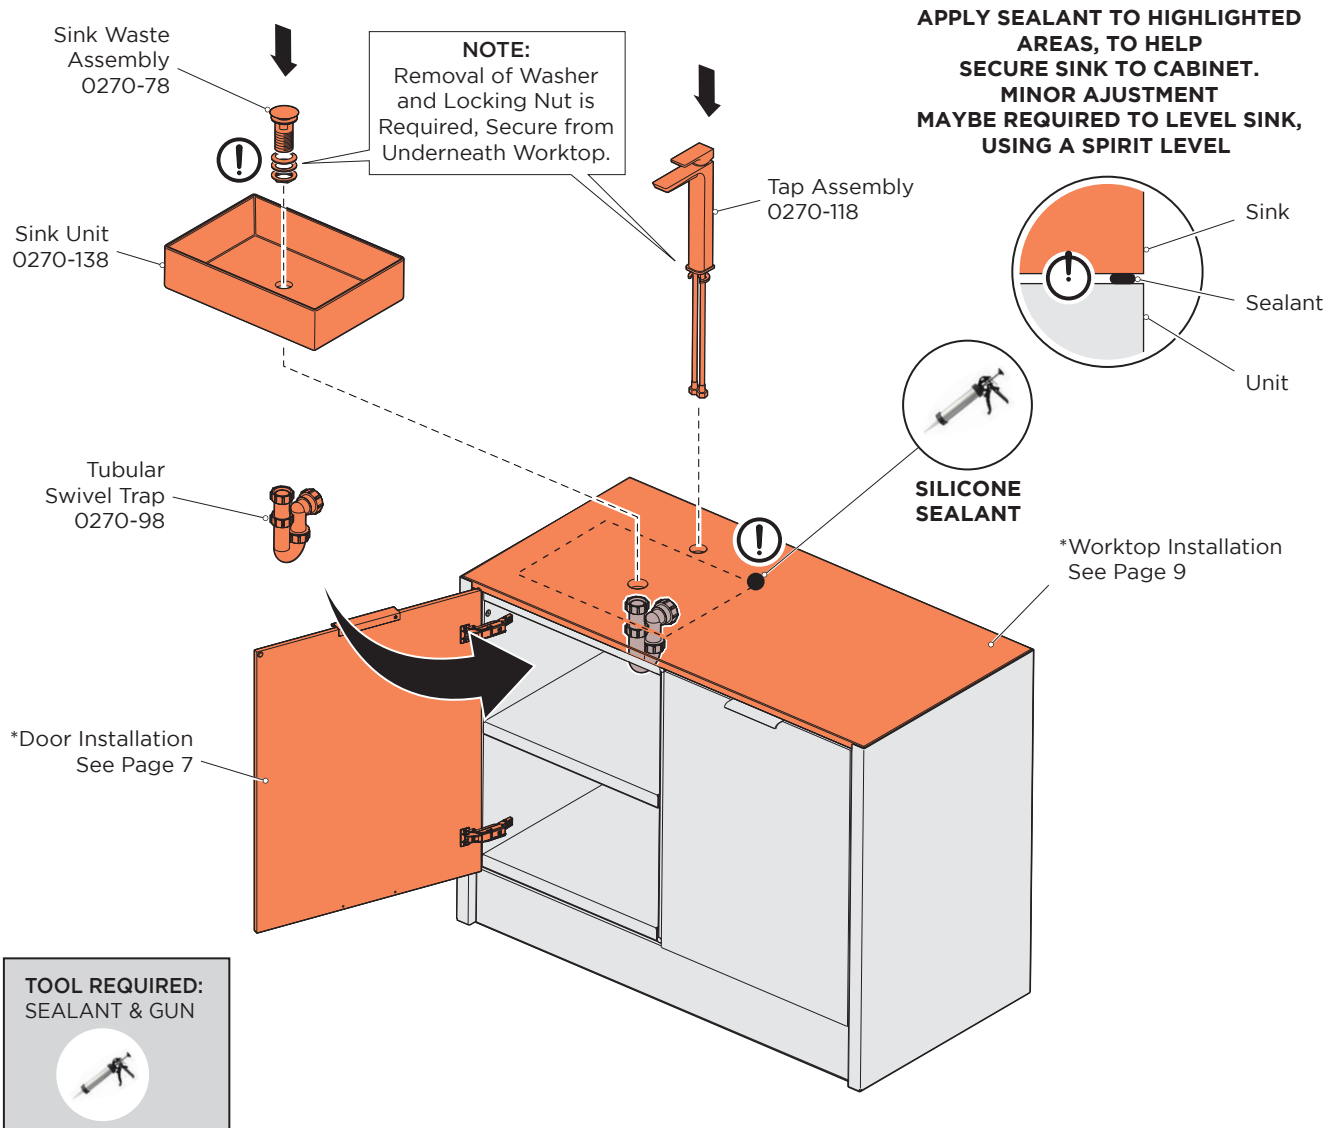

FRONT VIEW




FOR REAR SERVICE CONNECTION POINTS

Drain Trap Supply
Hot & Cold Water Supply

FOR FLOOR SERVICE CONNECTION POINT

Service Supplies

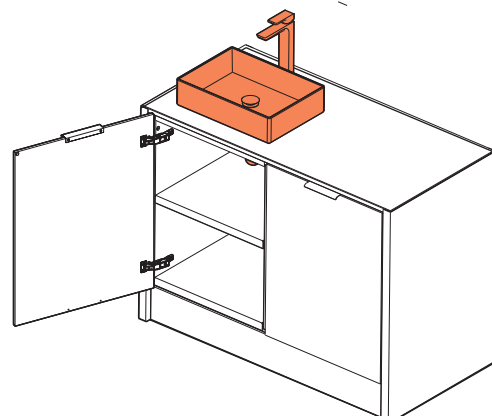

LOCATIONS OF WATER AND DRAIN TRAP CONNECTION POINTS.

NOTE: WE RECOMMEND ALL WATER CONNECTIONS MUST BE FITTED BY A QUALIFIED PROFESSIONALS.

12. Cooler Unit Installation




PRIOR TO ASSEMBLY:


REMEMBER TO TAKE CARE WHEN UNPACKING, PLEASE KEEP YOUR WORKSPACE CLEAN, CLEAR AND TIDY WHEN WORKING. UNNEEDED CARDBOARD AND PLASTICS SHOULD BE BINNED AND RECYCLED.

NOTE: WE RECOMMEND ALL ELECTRICAL CONNECTIONS MUST BE FITTED BY A QUALIFIED PROFESSIONAL, ACCORDING TO VALID LOCAL SAFETY REGULATIONS.

ALWAYS USE THE USER MANUAL ASSEMBLY INSTRUCTIONS FOR HELP.

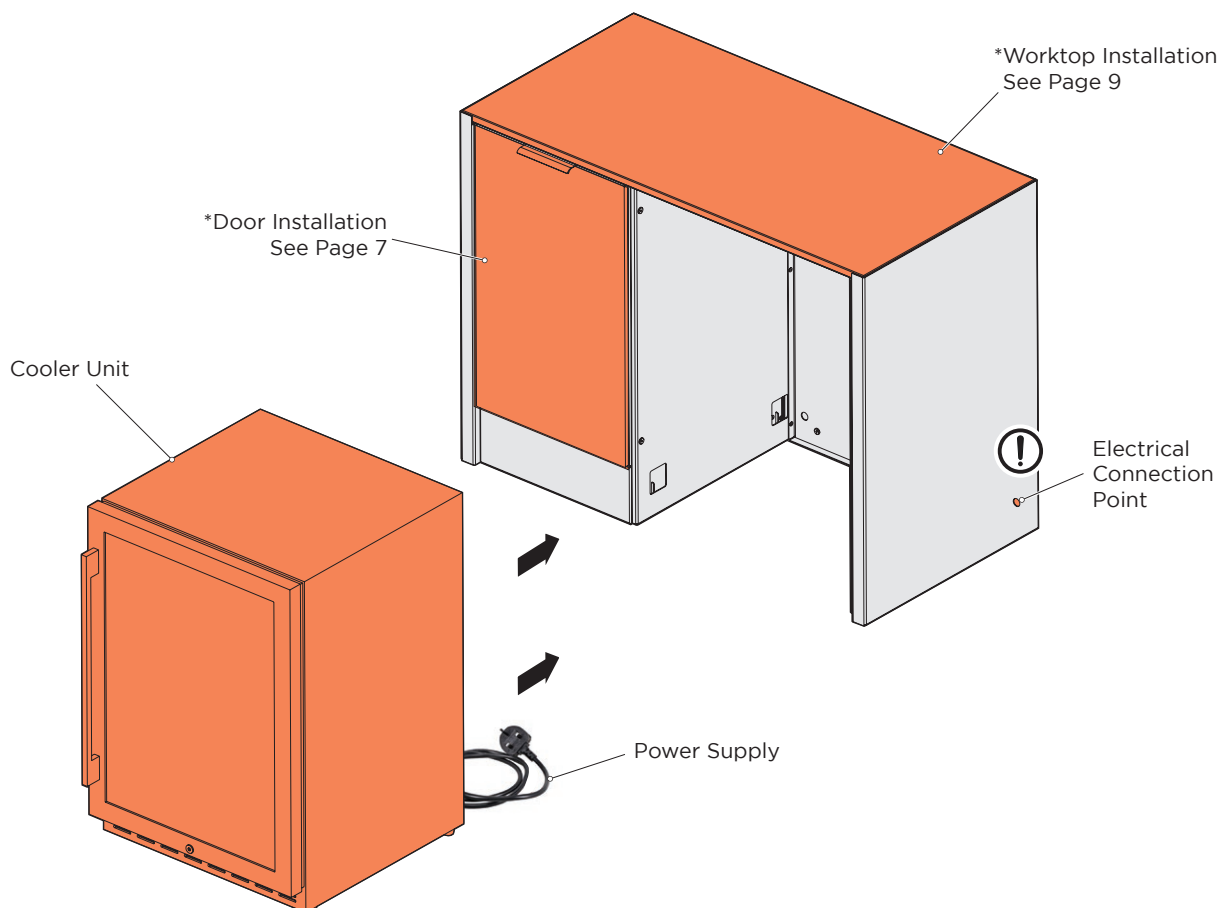


REAR VIEW



FOR REAR SERVICE CONNECTION POINTS

Electrical Supply
Option for Hidden
Socket Switch

Removable Grommet

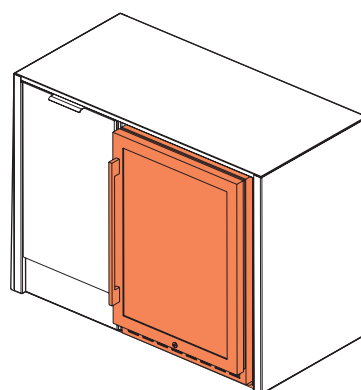

LOCATIONS OF ELECTRICAL CONNECTION POINTS, (REMOVABLE GROMMET).

NOTE: WE RECOMMEND ALL ELECTRICAL CONNECTIONS MUST BE FITTED BY A QUALIFIED PROFESSIONALS.

13. BBQ Unit Installation



PRIOR TO ASSEMBLY:

REMEMBER TO TAKE CARE WHEN UNPACKING, PLEASE KEEP YOUR WORKSPACE CLEAN, CLEAR AND TIDY WHEN WORKING. UNNEEDED CARDBOARD AND PLASTICS SHOULD BE BINNED AND RECYCLED.

NOTE: WE RECOMMEND ALL GAS CONNECTIONS MUST BE FITTED BY A QUALIFIED PROFESSIONALS ACCORDING TO VALID LOCAL SAFETY REGULATIONS. ALWAYS USE THE USER MANUAL ASSEMBLY INSTRUCTIONS FOR HELP.






WARNING:

KEEP CHILDREN AND PETS, FACE AND BODY AWAY FROM BURNER AREA WHEN IN USE, NEVER LEAVE UNATTENDED, UNTIL THE APPLIANCE HAS COOLED.

ENSURE THERE IS ADEQUATE VENTILATION, NEVER OBSTRUCT VENTS AROUND YOUR BBQ.

NOTE: WAIT UNTIL APPLIANCE HAS COOLED BEFORE COVERING.

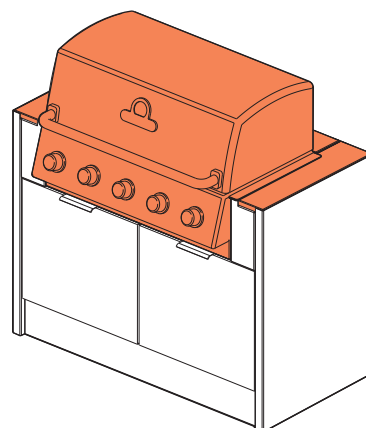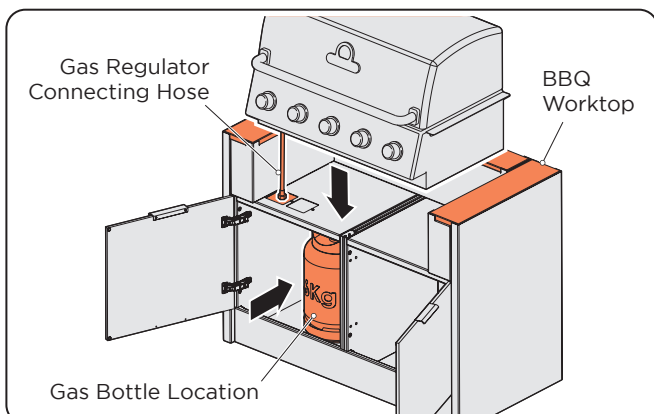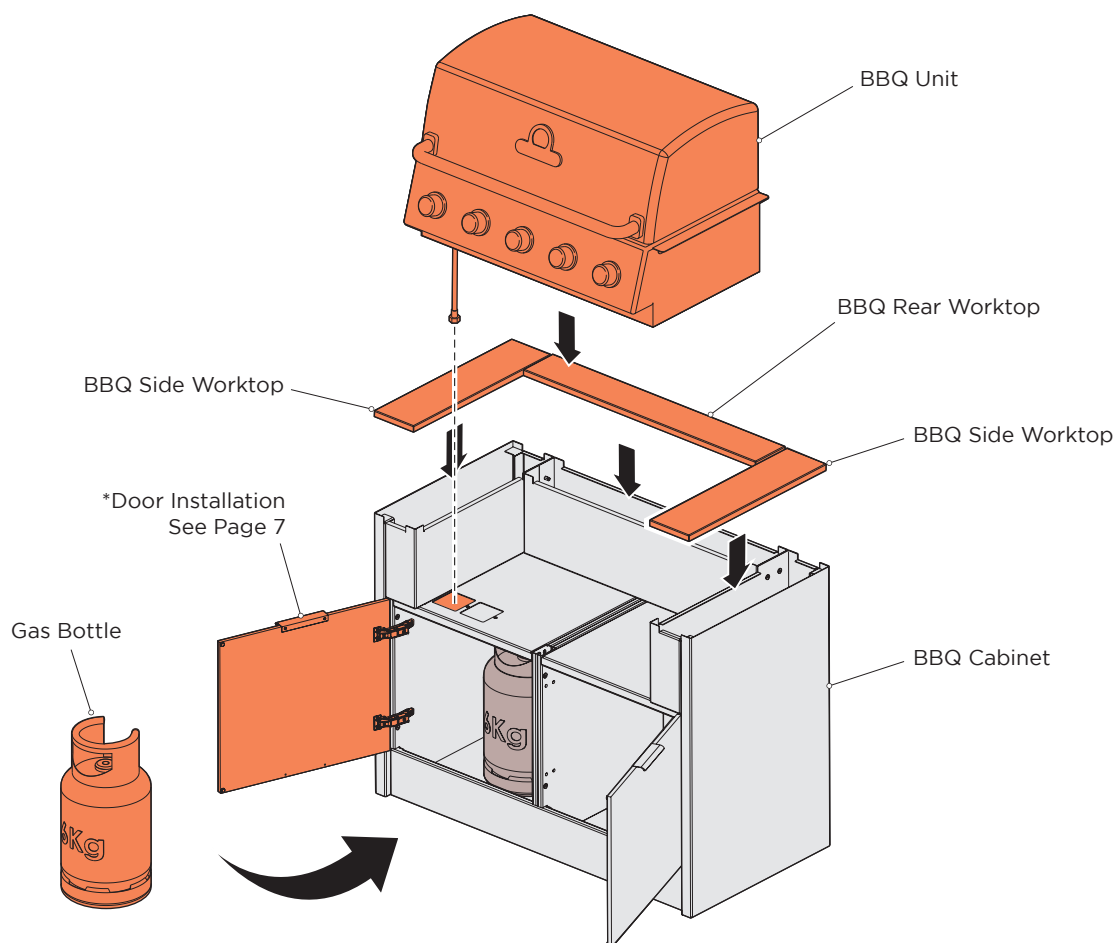

LOCATE AND SECURE SIDE AND REAR WORKTOPS. POSITION GAS BOTTLE INSIDE CABINET, LOCATE BBQ AND PLACE ON TOP OF CABINET. TAKE EXTRA CARE PLACING GAS REGULATOR HOSE THROUGH CUTAWAY. **NOTE:** CONNECTING GAS SUPPLY AND APPLIANCE APPLICATION, THE REFER TO USER MANUAL FOR HELP.

14. Kamado Unit Installation



PRIOR TO ASSEMBLY:

REMEMBER TO TAKE CARE WHEN UNPACKING, PLEASE KEEP YOUR WORKSPACE CLEAN, CLEAR AND TIDY WHEN WORKING. UNNEEDED CARDBOARD AND PLASTICS SHOULD BE BINNED AND RECYCLED.

ALWAYS USE THE USER MANUAL ASSEMBLY INSTRUCTIONS FOR HELP.




WARNING:

KEEP CHILDREN AND PETS, FACE AND BODY AWAY FROM BURNER AREA WHEN IN USE, NEVER LEAVE UNATTENDED, UNTIL THE APPLIANCE HAS COOLED.

ENSURE THERE IS ADEQUATE VENTILATION, NEVER OBSTRUCT YOUR KAMADO.

NOTE: WAIT UNTIL APPLIANCE HAS COOLED BEFORE COVERING.

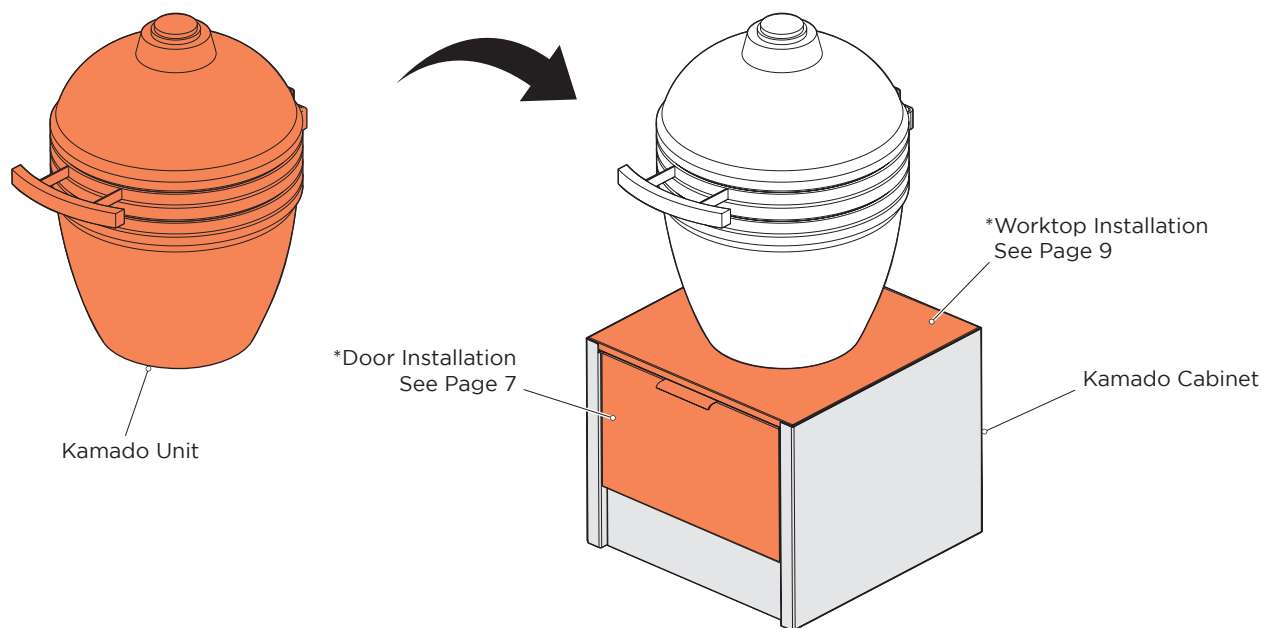

15. Limited Warranty

Our Buckley Outdoor Kitchen comes with a lifetime warranty on all metal components, commencing from the date of purchase.

TERMS AND CONDITIONS:

- A HEX Living warranty includes manufacturing deficiencies and defective parts and extends to the replacement of these parts. Expenses for shipping, installation, replacement of worn parts and other cost are not covered by the warranty. The warranty lapses in case of mishandling and if any kind of unauthorised modifications are made to the appliance.
- Please refer to each appliances own warranty policy.
- Contact customer services if you have any questions. +44 (0) 1889 272 056

IMPORTANT: KEEP THIS MANUAL FOR FUTURE REFERENCE.

16. Parts List and Tools Required


Parts List



Part Ref: 0270-188
M6 Nyloc Nut?




Part Ref: 0270-188
M6 Spacer?



Part Ref: 0270-123
Shelf Clip



Part Ref: 0270-187
M6 x 20 Bolt



Part Ref: 0270-188
M6 x 40 Bolt



Part Ref: 0270-196
Self Tapping Screw

Tools Required



4mm Allen Key



5mm Allen Key



Sealant & Gun

????



Spirit Level





Phillips Screwdriver Head



Power Drill



Tape Measure ?

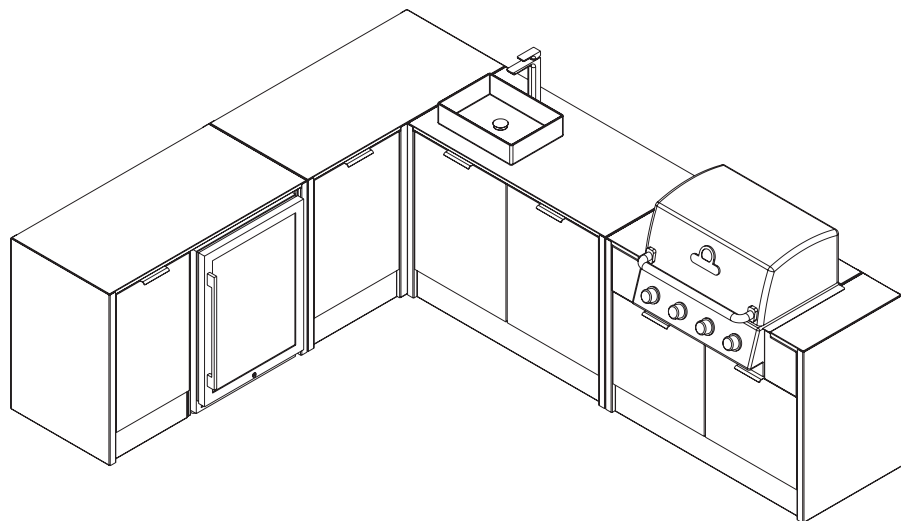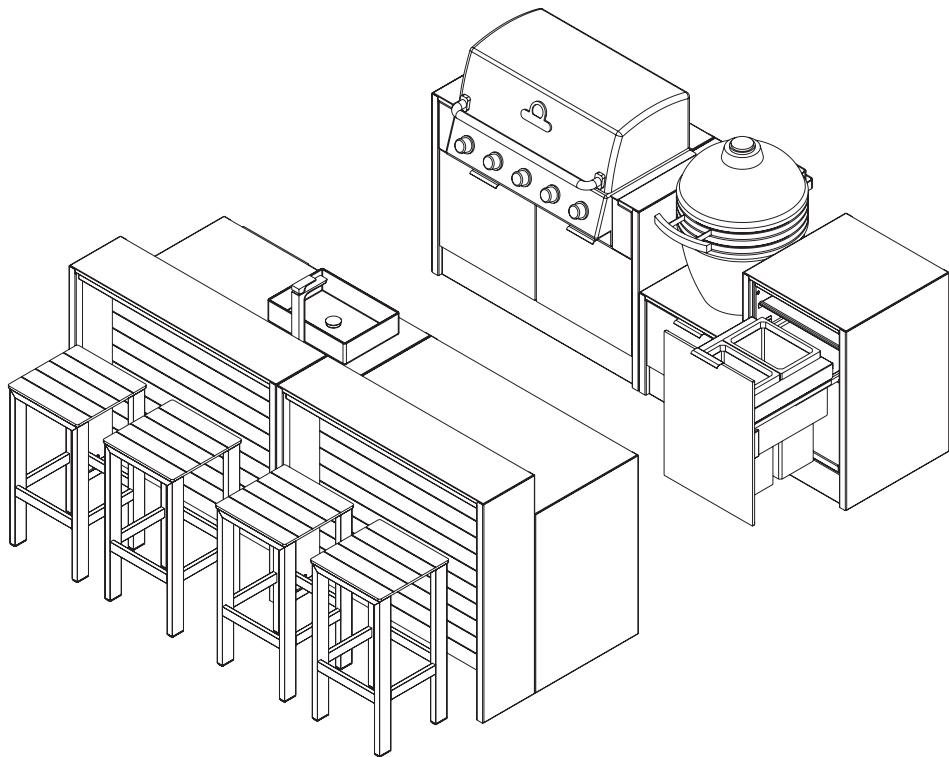

IMPORTANT: Keep this manual for future reference.