



# PERGOLA

## Blind Assembly Guide



**IMPORTANT: PLEASE REGISTER YOUR HEX LIVING PRODUCT AFTER ASSEMBLY**


Using the unique serial number, simply register your product at [www.hexliving.co.uk](http://www.hexliving.co.uk) or use the QR code above to access the HEX Living lifetime warranty and online support.



# Blind Assembly Guide


**ENSURE ALL ITEMS LISTED ARE PRESENT PRIOR TO STARTING ASSEMBLY PROCEDURE**  
SCALE OF ITEMS WILL VARY TO AID VISUAL IDENTIFICATION.

**PERGOLA  
BLIND CASSETTE**  
PART REF: A  
QTY: X1



## TWO PERSON ASSEMBLY

This well engineered contemporary pergola blind requires 2 people to assemble, time to complete in approximately 30 minutes.



## PERSONAL PROTECTION EQUIPMENT

We advise appropriate personal protective equipment is worn during assembly including eye protection and gloves.



Eye Protection





Gloves


## WARNINGS AND ADVISORIES

 Select a dry and calm day for your assembly, do not try to install the blind in windy conditions!

**SIDE RAIL**  
PART REF: B  
QTY: x2

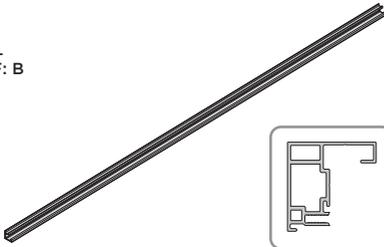


**SIDE RAIL COVER**  
PART REF: D  
QTY: x2

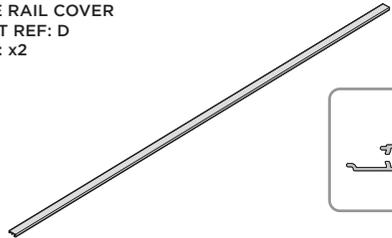


**GUIDE STRIP**  
PART REF: C  
QTY: x 2



**SIDE RAIL END (LH)**  
PART REF: E  
QTY: x1



**SIDE RAIL END (RH)**  
PART REF: F  
QTY: x1



**M4 x 19MM SELF TAPPING SCREW**  
PART REF: G  
QTY: x 8



**3.9 x 25MM SCREW**  
PART REF: H  
QTY: x8





## TOOLS REQUIRED

- STEP LADDER (OPTIONAL)
- POZI HEAD SCREW DRIVER
- POWER DRILL
- POZI HEAD DRILL BIT


# Blind Assembly Guide

## ASSEMBLY STAGE 1

LOCATE SIDE RAILS (PART B) ONTO BLIND CASSETTE TABS (PART A).  
SECURE RAIL ENDS (PARTS E & F) TO RAIL BOTTOMS.

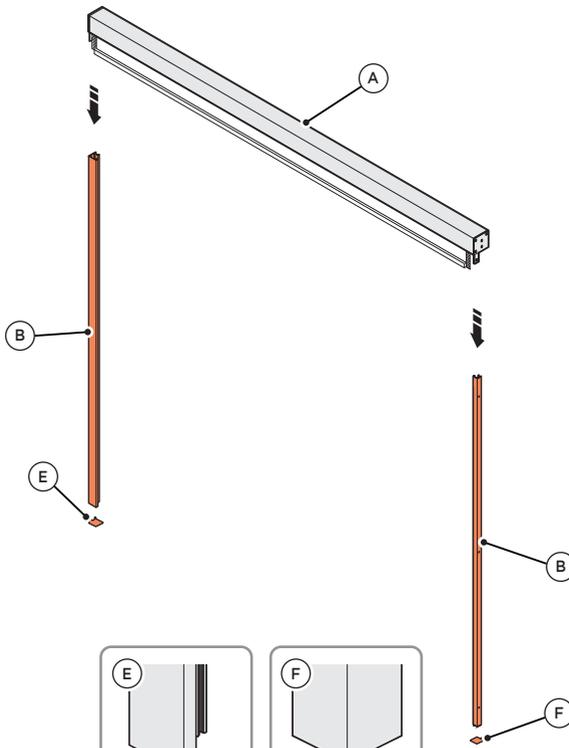


1A




RH

ATTACH END CAPS TO EACH RAIL BASE.

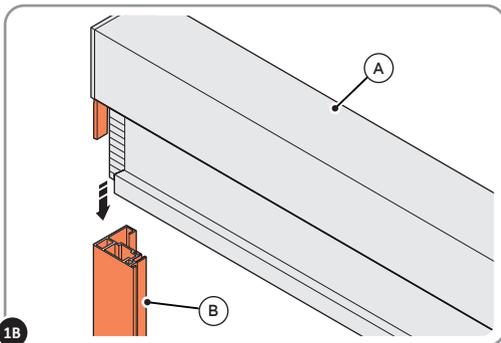

1B

ATTACH BLIND CASSETTE TO SIDE RAIL AS SHOWN ABOVE.

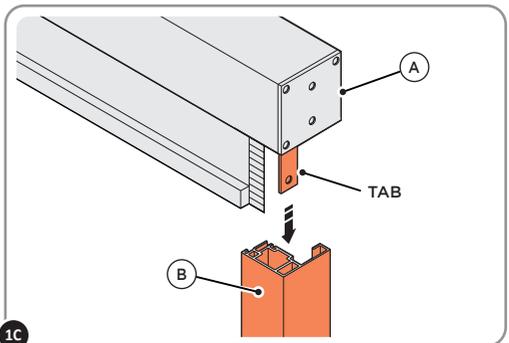



1C

REPEAT PROCEDURE ON THE OPPOSITE SIDE.

# Blind Assembly Guide

## ASSEMBLY STAGE 2

**!**  
**IMPORTANT:**  
BLIND CASSETTE SHOULD  
BE FLUSH WITH EDGE OF  
PERGOLA BEAM BEFORE  
SECURING

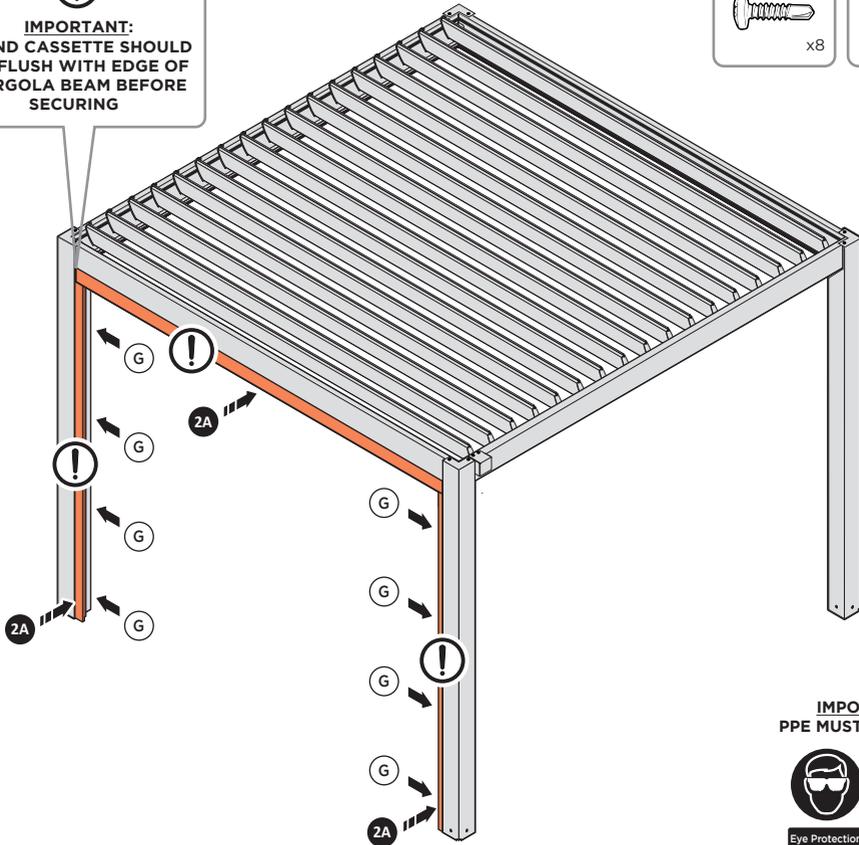


**IMPORTANT:**  
PPE MUST BE WORN!




Eye Protection

Gloves

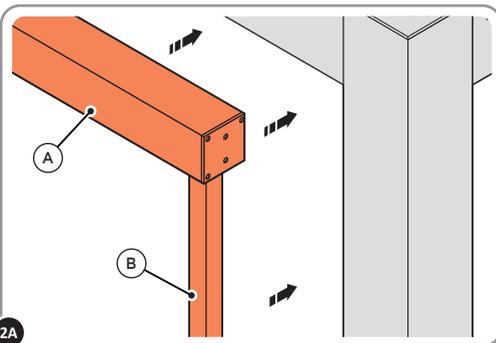

**2A**  
POSITION BLIND CASSETTE AND SIDE RAILS (PARTS A & B)  
BETWEEN THE PERGOLA LEGS, AS SHOWN ABOVE.



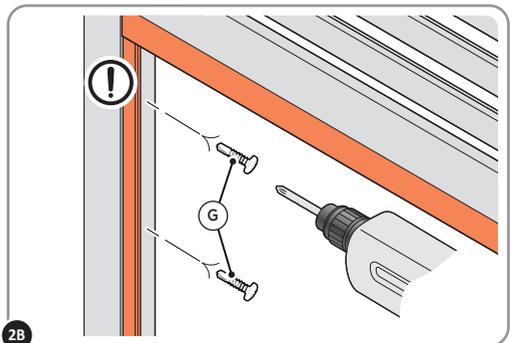


**2B**  
SECURE IN PLACE USING FIXING (E) IN 8 POSITIONS.


# Blind Assembly Guide

## ASSEMBLY STAGE 3


LOCATE AND SECURE THE GUIDE STRIPS INTO SIDE RAILS.

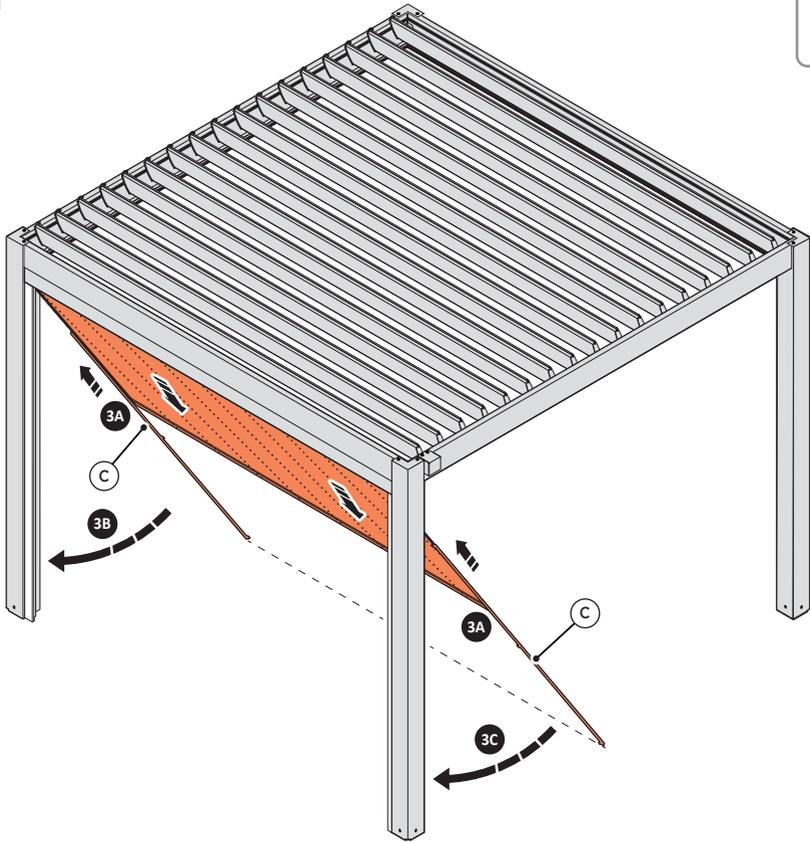

**3A** UNWIND THE BLIND APPROX. 50CM, AND INSERT THE GUIDE STRIP (PART C) OVER THE ZIPPER FEATURE ALONG THE EDGE OF THE BLIND.



**3B**





**3C** REPEAT PROCEDURE ON THE OPPOSITE SIDE.

# Blind Assembly Guide

## ASSEMBLY STAGE 4


LOCATE AND SECURE THE SIDE RAIL COVERS (PART D).

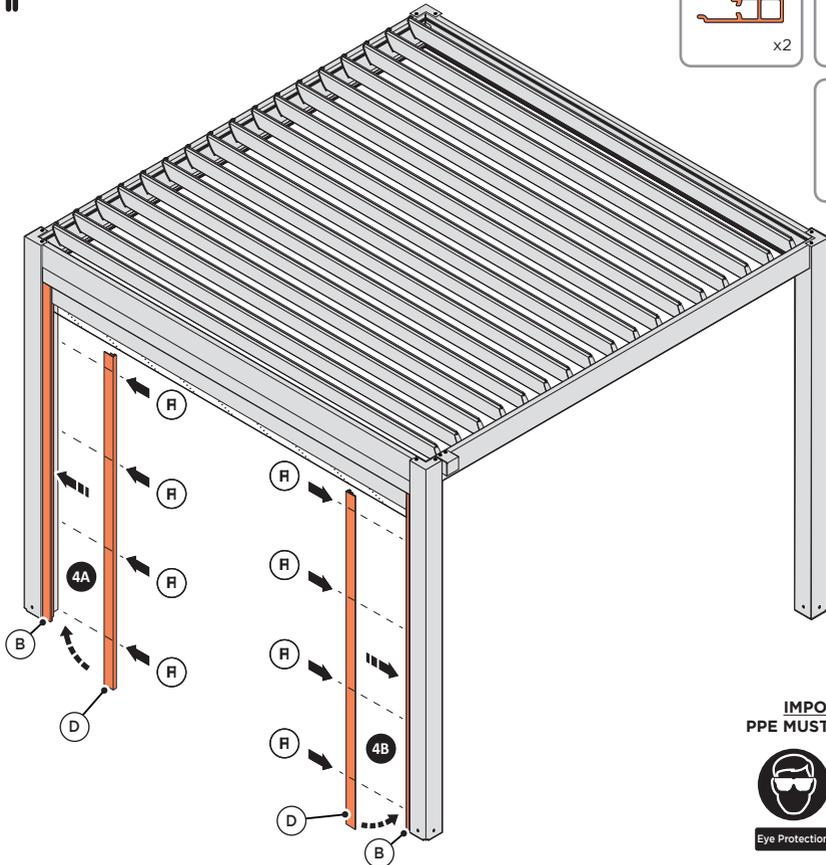

**IMPORTANT:  
PPE MUST BE WORN!**




LH SIDE



**4A**  
LOCATE SIDE RAIL COVER (PART D) AND SECURE USING SCREWS (PART H), AS SHOWN ABOVE.

RH SIDE



**4B**  
REPEAT PROCEDURE ON THE OPPOSITE SIDE.

FIG.1





FIG.2



**4C**  
DO NOT TO TRAP (PART C) FIG.2 INSIDE THE SIDE RAILS, AS SHOWN ABOVE.

## ASSEMBLY STAGE 5

CHECK THE FUNCTIONALITY OF THE BLIND BY OPERATING IN A UP AND DOWN MOTION SEVERAL TIMES.



## PRECAUTIONS 6

WHEN OPERATING THE BLIND, ENSURE BOTH HANDS ARE LOCATED CENTRALLY AS SHOWN BELOW AND NOT TO ONE SIDE AS THIS COULD CAUSE THE BLIND TO JAM.

FIG.3


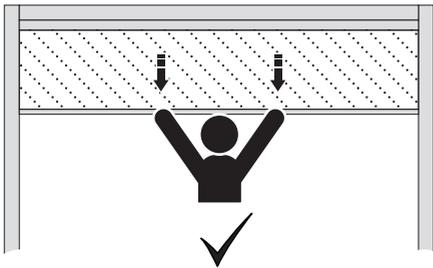


FIG.4




## PRECAUTIONS 6 (CONTINUED)


IN THE EVENT OF THE BLIND JAMMING, PLACE YOUR HANDS EITHER SIDE OF THE BLIND AND CAREFULLY MOVE THE BLIND UP OR DOWN UNTIL FREE.

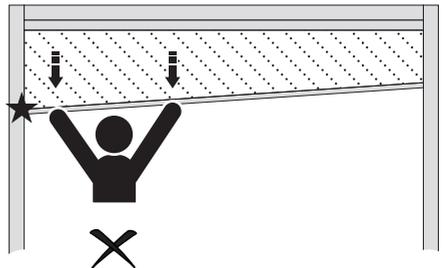

GRIP THE BLIND BETWEEN YOUR PALMS

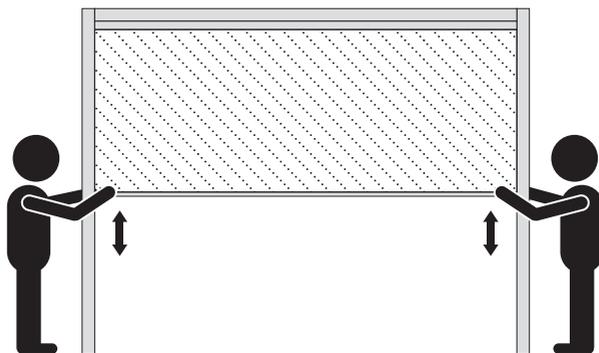

CHECK PERGOLA FRAME FOR SQUARENESS, TO PREVENT BLIND ISSUES.

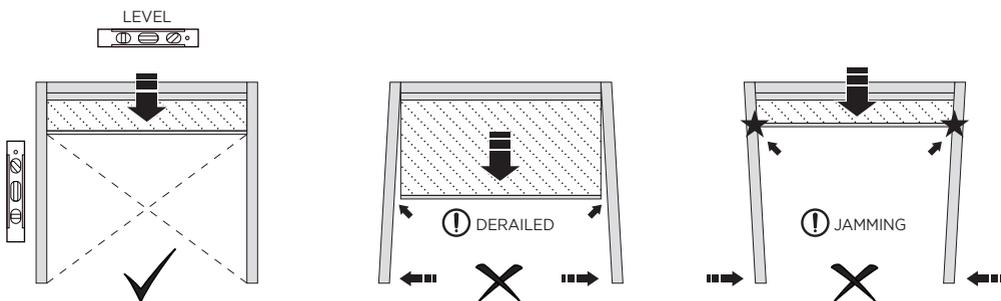




### ⚠ MAINTENANCE TIPS 7

- IF BLIND ISSUES PERSIST CHECK YOUR PERGOLA FRAME FOR SQUARENESS, AND ADJUST IF NECESSARY REFERRING TO THE PERGOLA ASSEMBLY MANUAL.
- ENSURE SIDE RAILS REMAIN FREE OF DEBRIS AND REMOVE ANY VISUAL OBSTRUCTIONS PERIODICALLY.
- IN SOME CASES APPLYING A LIGHT COATING OF A SILICONE-BASED LUBRICANT (I.E. VASELINE) TO THE GUIDE STRIPS WILL HELP IMPROVE THE OPERATION OF THE BLIND.
- IF YOU BELIEVE THERE IS A FAULT, PLEASE CALL THE INSTALLATION COMPANY OR CONTACT OUR HEX LIVING CUSTOMER SERVICE: +44 (0) 1889 272 056.


# Blind Assembly Guide

## TROUBLE SHOOTING 8


IN THE EVENT OF THE BLIND COMING OUT OF THE GUIDE RAIL, PLEASE FOLLOW THE STEPS BELOW TO RECTIFY THE PROBLEM.

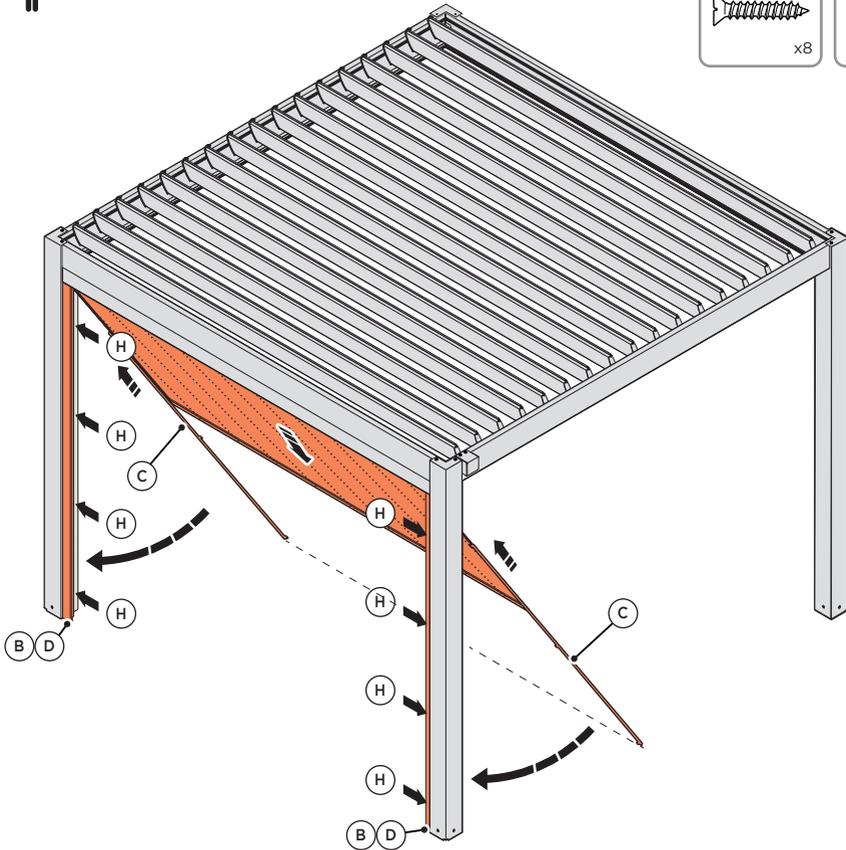

8A LOCATE SIDE RAIL COVER (PART D), REMOVE SCREWS (PART H) AND DETACH FROM SIDE RAIL (PART B).



8B FOR THE NEXT STAGE, FOLLOW STEPS ON PAGES 4 & 5 WHICH SHOWS HOW TO SECURE THE BLIND TO THE GUIDE STRIP AND SIDE RAILS.



**NOTES**

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....



## Caring for your HEX Living product

---

Your **HEX Living product** is designed to stand the test of time, which is why we're happy to offer a **lifetime warranty** on our products. With zero maintenance required, simply assemble your HEX Living product, and enjoy putting it to great use in your garden.

Periodically, you might want to give your product a clean, these simple care tips are not essential to the performance of your product:

- Remove surface dirt with plain water using a low powered jet wash or sponge, the coating on our products will ensure dirt or mud simply wipes away.
- If you've purchased a HEX Living metal pergola, periodically clear the roof of fallen leaves.
- Blinds should be regular cleaned and remove any garden debris as you would on your home.

**Customer Service: +44 (0) 1889 272 056**